



### Features

- Single-Supply Operation from +2.2V ~ +5.5V
- Rail-to- Rail Input / Output
- Gain-Bandwidth Product: 10MHz (Typ.)
- Low Input Bias Current: 10pA (Typ.)
- Low Offset Voltage: 5mV (Max.)
- Quiescent Current: 800µA per Amplifier (Typ.)
- Operating Temperature: -40C ~ +125C
- Available in SOT23-5 Packages

### Applications


- Portable Equipment
- Mobile Communications
- Smoke Detector
- Sensor Interface
- Medical Instrumentation

### General Description


The KRN8605ARTZ is wideband, low-noise, low-distortion dual operational amplifier, that offer rail-to-rail inputs 1 outputs and single supply operation down to 2.2V. They draw 1.6mA of quiescent supply current while featuring ultra-low distortion (0.0002% THD+N), as well as low input voltage-noise density (15nV/Hz) and low input current noise density (0.5fA/√Hz). These features make the devices an ideal choice for applications that require low distortion and/or low noise. These amplifiers have inputs and outputs which swing rail-to-rail and their input common mode voltage range includes ground. The maximum input offset of these amplifiers is less than 5mV.

The KRN8605ARTZ are unity gain stable with a gain-bandwidth of 10MHz. The KRN8605ARTZ is available in SOT23-5 packages. The extended temperature range of -40C to +125C over all supply voltages offers additional design flexibility.

### Pin Assignments

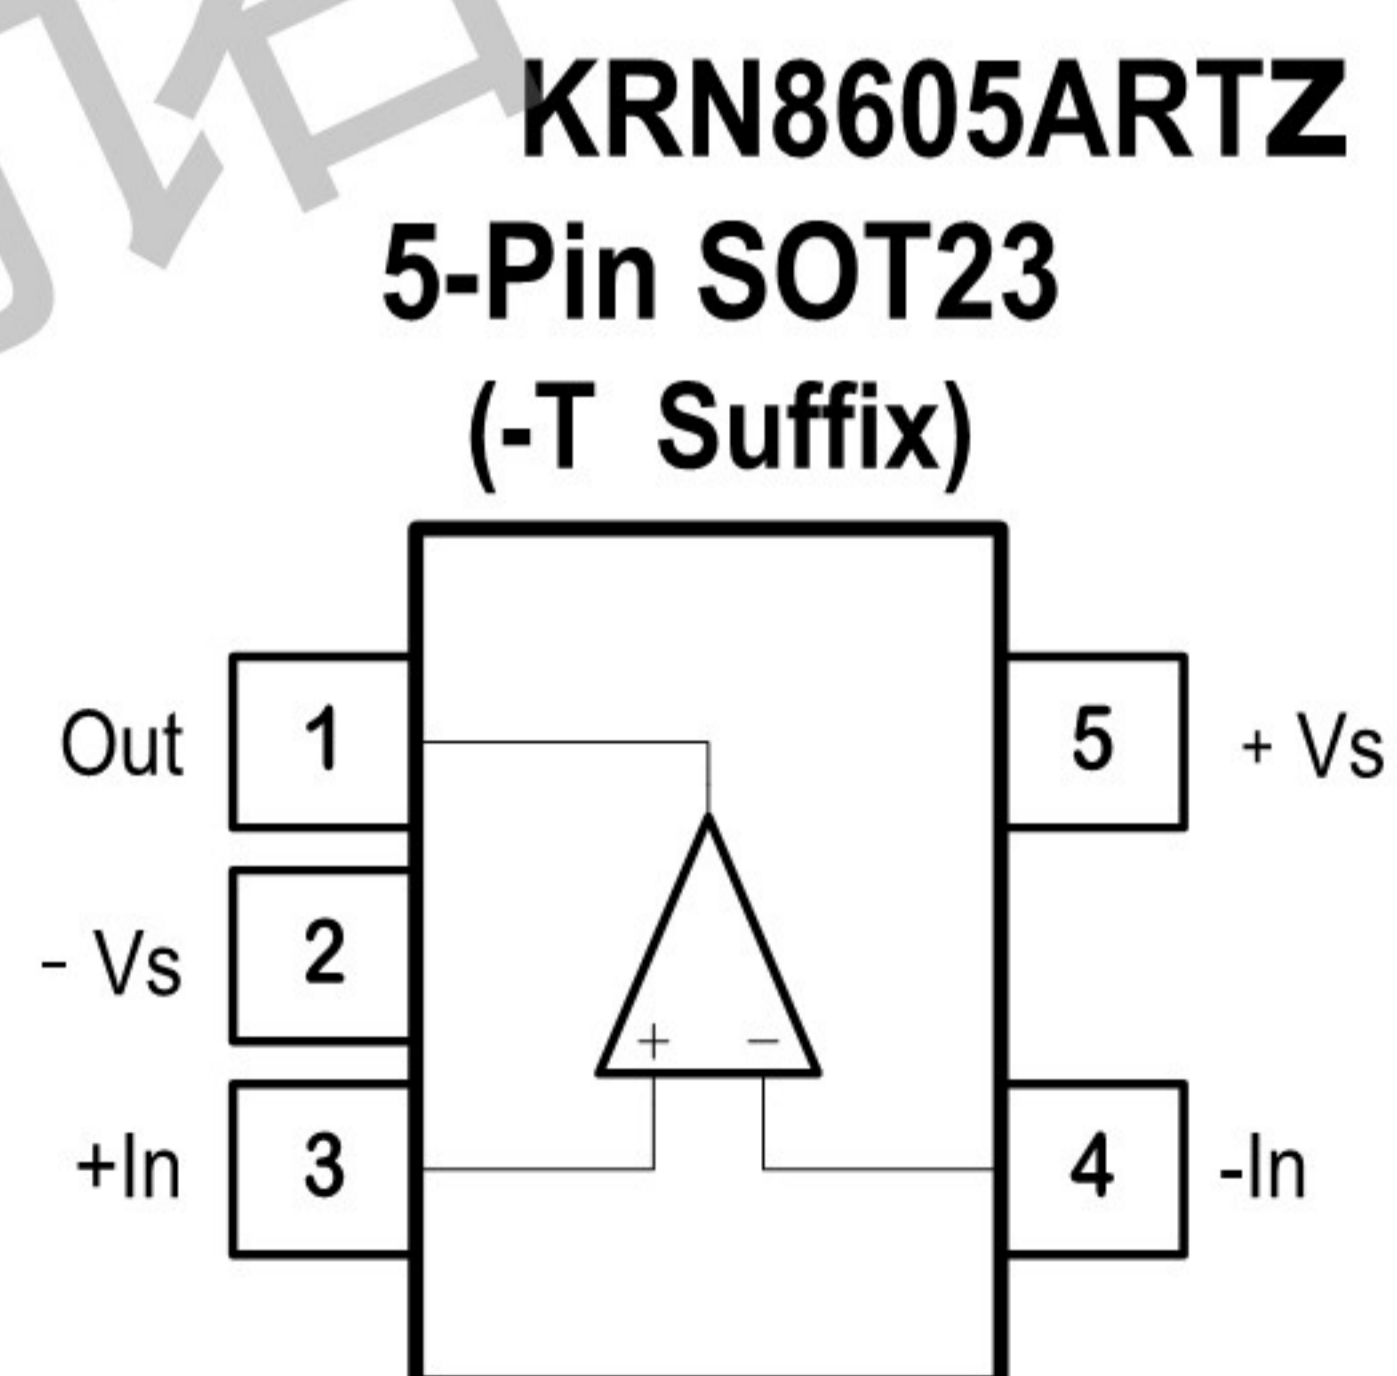

### Marking

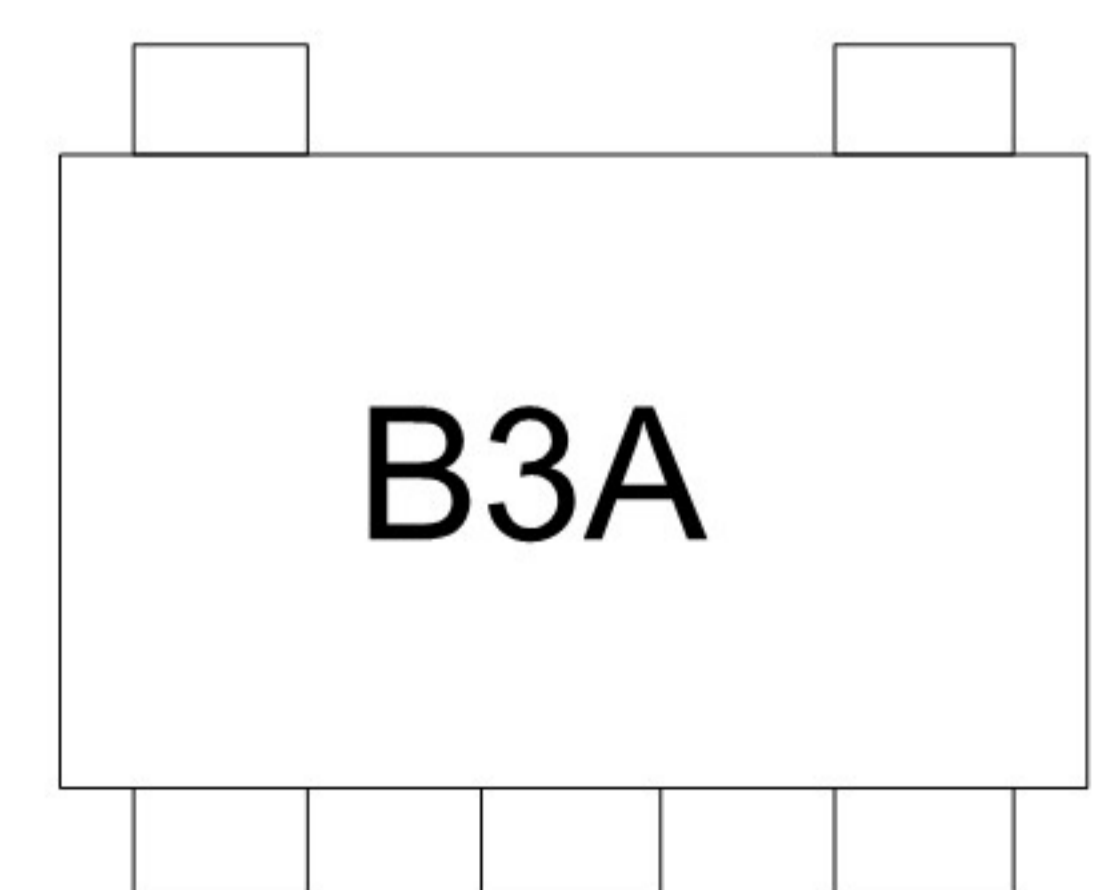



## Electrical Characteristics

(VDD= +5V, VSS= 0V, VCM= 0V, VOUT = VDD/2, RL= 100K tied to VDD/2, SHDNB= VDD, TA= -40C to +125C, unless otherwise noted. Typical values are at TA =+25C.) (Notes 1)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Supply-Voltage Range	V <sub>DD</sub>	Guaranteed by the PSRR test	2.2	-	5.5	V
Quiescent Supply Current (per Amplifier)	I <sub>DD</sub>	V <sub>DD</sub> = 3V	-	0.8	-	mA
		V <sub>DD</sub> = 5V	-	0.8	1.2	
Input Offset Voltage	V <sub>OS</sub>	T <sub>A</sub> = +25°C	-	-	±5	mV
		T <sub>A</sub> = -40°C to +85°C	-	-	-	
		T <sub>A</sub> = -40°C to +125°C	-	-	±1.5	
Input Offset Voltage Tempco	ΔV <sub>OS</sub> /ΔT		-	±0.3	±6	μV/°C
Input Bias Current	I <sub>B</sub>	(Note 3)	-	±1	±100	pA
Input Offset Current	I <sub>OS</sub>	(Note 3)	-	±1	±100	pA
Input Common-Mode Voltage Range	V <sub>CM</sub>	Guaranteed by the T <sub>A</sub> = 25°C	-0.2	-	V <sub>DD</sub> +0.2	V
		CMRR test T <sub>A</sub> = -40°C to +125°C	0	-	V <sub>DD</sub> 0	
Common-Mode Rejection Ratio	CMRR	V <sub>SS</sub> -0.2V ≤ V <sub>CM</sub> ≤ V <sub>DD</sub> +0.2V T <sub>A</sub> = +25°C	-	75	-	dB
		V <sub>SS</sub> ≤ V <sub>CM</sub> ≤ 5V T <sub>A</sub> = +25°C	65	80	-	
		V <sub>SS</sub> -0.2V ≤ V <sub>CM</sub> ≤ V <sub>DD</sub> +0.2V T <sub>A</sub> = -40°C to +125°C	-	65	-	
Power-Supply Rejection Ratio	PSRR	V <sub>DD</sub> = +2.2V to +5.5V	75	90	-	dB
Open-Loop Voltage Gain	A <sub>V</sub>	R <sub>L</sub> =100kΩ to V <sub>DD</sub> /2, 100mV ≤ V <sub>OS</sub> ≤ V <sub>DD</sub> -125mV	90	100	-	dB
		R <sub>L</sub> =1kΩ to V <sub>DD</sub> /2, 200mV ≤ V <sub>OS</sub> ≤ V <sub>DD</sub> -250mV	75	85	-	
		R <sub>L</sub> =500Ω to V <sub>DD</sub> /2, 350mV ≤ V <sub>OS</sub> ≤ V <sub>DD</sub> -500mV	55	65	-	
Output Voltage Swing	V <sub>OUT</sub>	V <sub>IN+</sub> -V <sub>IN-</sub>   ≥ 10mV V <sub>DD</sub> -V <sub>OH</sub>	-	10	35	mV
		R <sub>L</sub> = 10kΩ to V <sub>DD</sub> /2 V <sub>OL</sub> -V <sub>SS</sub>	-	10	30	
		V <sub>IN+</sub> -V <sub>IN-</sub>   ≥ 10mV V <sub>DD</sub> -V <sub>OH</sub>	-	80	200	
		R <sub>L</sub> = 1kΩ to V <sub>DD</sub> /2 V <sub>OL</sub> -V <sub>SS</sub>	-	50	150	
		V <sub>IN+</sub> -V <sub>IN-</sub>   ≥ 10mV V <sub>DD</sub> -V <sub>OH</sub>	-	100	350	



		$R_L = 500\Omega$ to $V_{DD}/2$ $V_{OL}-V_{SS}$		80	260	
Output Short-Circuit Current	$I_{SC}$	Sinking or Sourcing	-	$\pm 50$	-	mA
PDB Logic Low	$V_{IL}$		-	-	0.8	V
PDB Logic High	$V_{IH}$		2	-	-	V
Turn-On Time	$T_{ON}$		-	2.2	-	$\mu s$
Turn-Off Time	$T_{OFF}$		-	0.8	-	$\mu s$
Output Leakage Current	$I_{LEAK}$	Shutdown Mode (PDB = $V_{SS}$ ), $V_{OUT} = V_{SS}$ to $V_{DD}$	-	$\pm 0.001$	$\pm 1.0$	$\mu A$
Input Capacitance	$C_{IN}$			10		pF
Gain Bandwidth Product	GBW	$A_v = +1V/V$	-	10	-	MHz
Slew Rate	SR	$A_v = +1V/V$	-	4.5	-	V/ $\mu s$
Full Power Bandwidth		$A_v = +1V/V$	-	0.4	-	MHz
Phase Margin	$\phi_m$	$A_v = +1V/V$	-	55	-	deg
Gain Margin	$G_m$	$A_v = +1V/V$	-	12	-	dB
Settling Time	$t_s$	To 0.01%, $V_{OUT} = 2V$ step $A_v = +1V/V$	-	1	-	$\mu s$
Capacitive-Load Stability	$C_{LOAD}$	No sustained oscillations. $A_v = +1V/V$	-	200	-	pF
Peak-to-Peak Input Noise Voltage (Note 5)	$e_n(p-p)$	$f = 0.1Hz$ to $10Hz$	-	5	-	$\mu Vp-p$
Input Voltage Noise Density	$e_n$	$f = 10Hz$ $f = 1kHz$ $f = 30kHz$	-	60 30 15	-	nV/ $\sqrt{Hz}$
Input Current Noise Density	$i_n$	$f = 1kHz$				fA/ $\sqrt{Hz}$
Total Harmonic Distortion plus Noise	THD+N	$V_{OUT} = 2Vp-p$ , $A_v = +1V/V$ , $f = 1kHz$ $R_L = 10k\Omega$ to GND $f = 20kHz$ $V_{OUT} = 2Vp-p$ , $A_v = +1V/V$ , $f = 1kHz$ $R_L = 1k\Omega$ to GND $f = 20kHz$	-	0.0001 0.002 0.0002 0.004	-	%

Note 1: All devices are 100% production tested at  $T_A = +25C$  ; all specifications over the automotive



temperature range is guaranteed by design, not production tested.

Note 2: Parameter is guaranteed by design.

Note 3: Peak-to-peak input noise voltage is defined as six times RMS value of input noise voltage.



PACKAGE MECHANICAL DATA

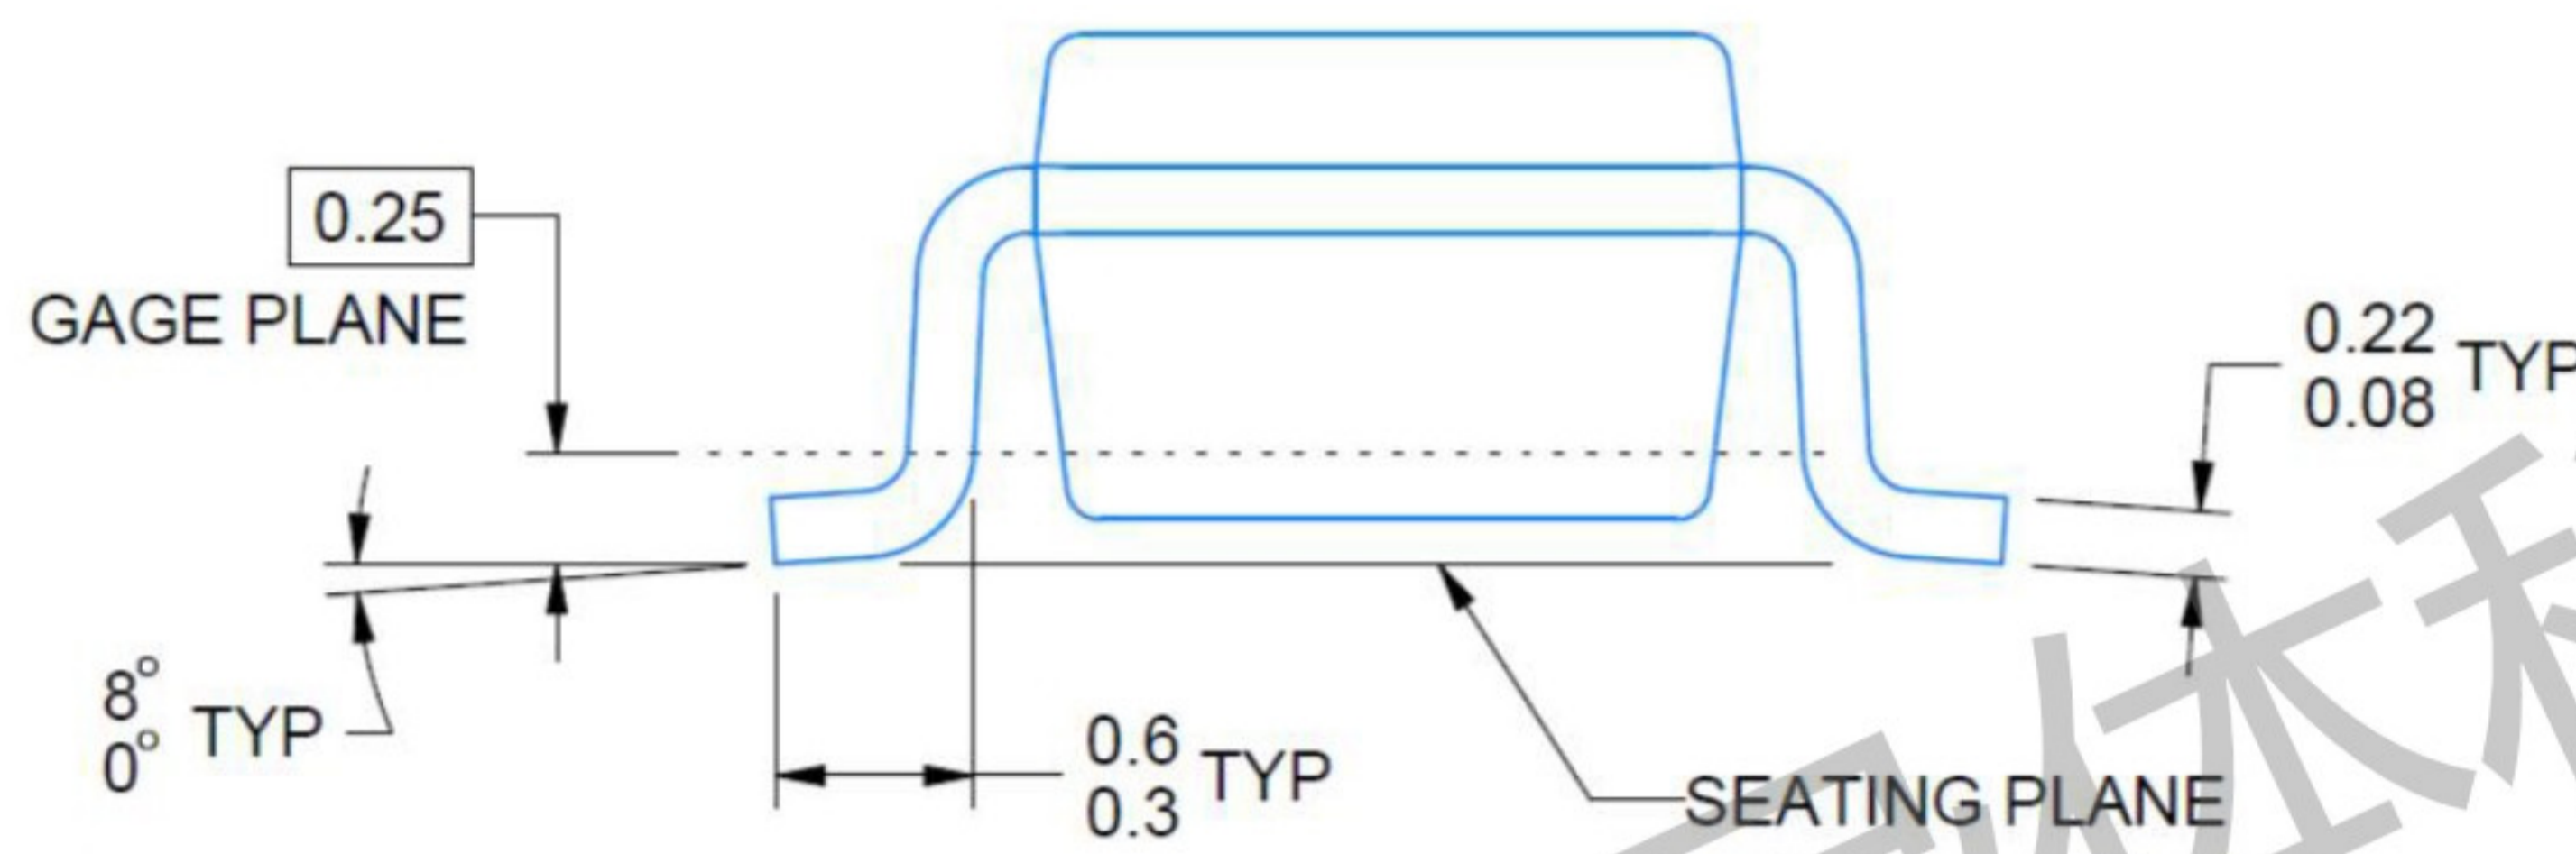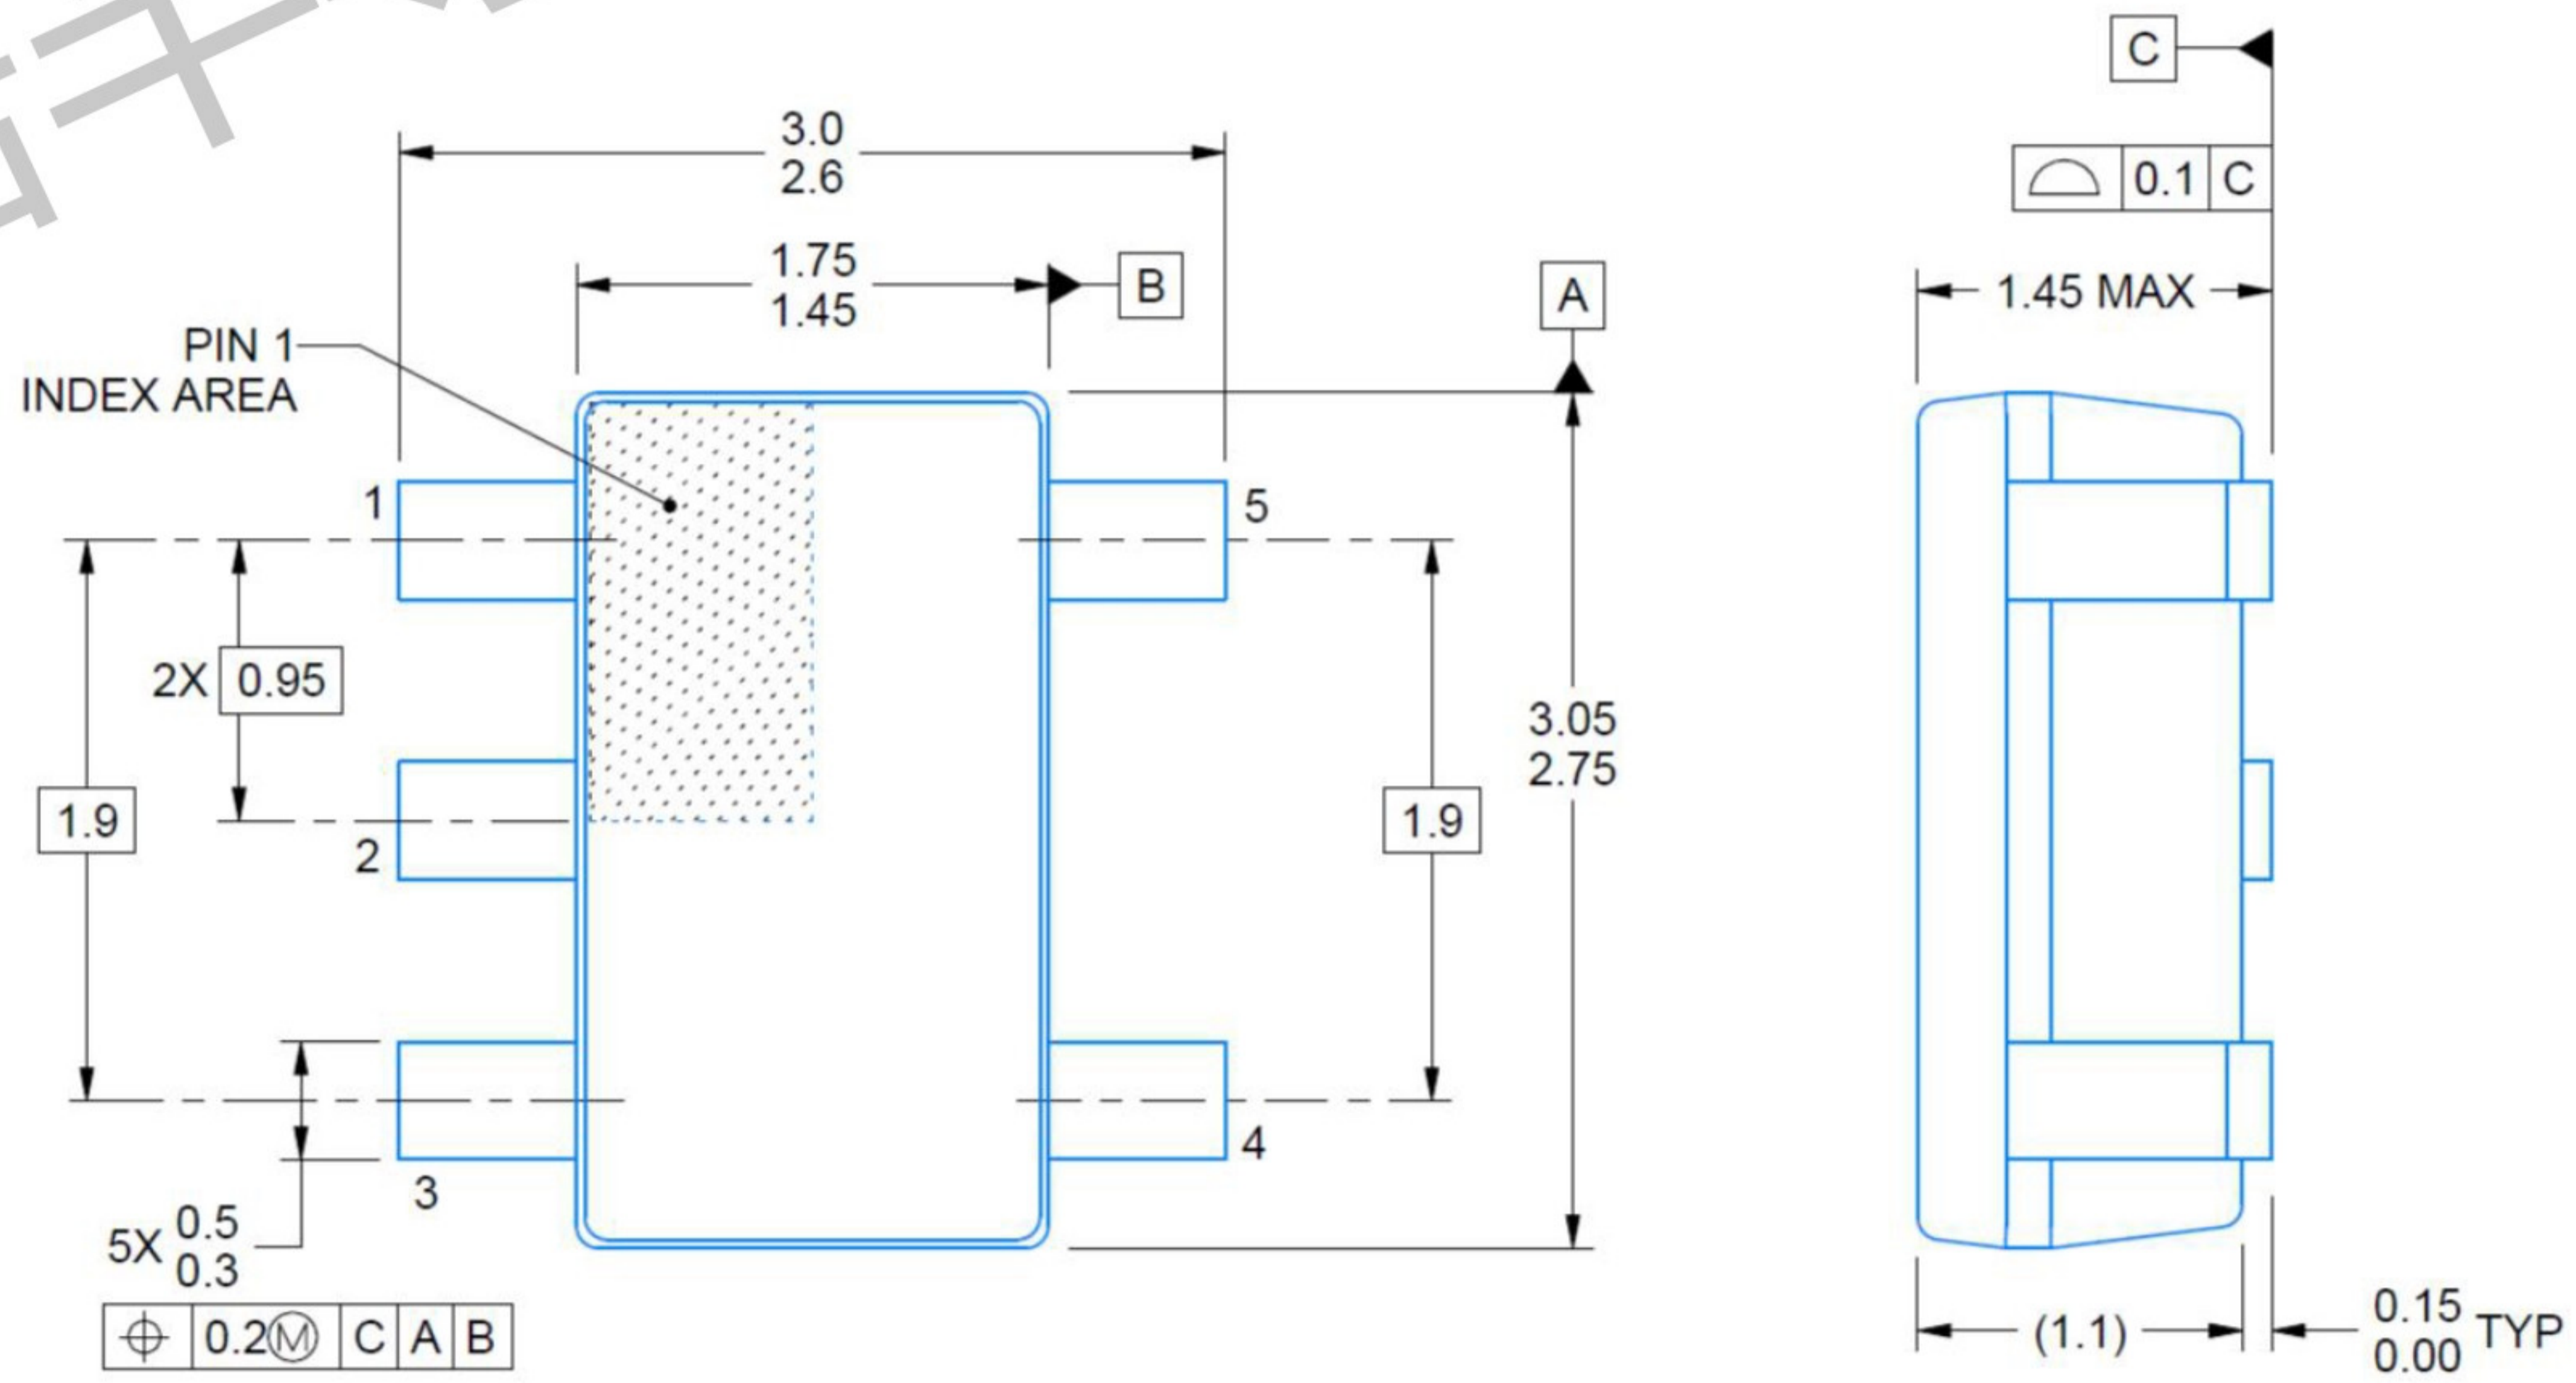

REEL SPECIFICATION

P/N	PKG	QTY
KRN8605ARTZ	SOT-23-5	3000