




Installation Guide

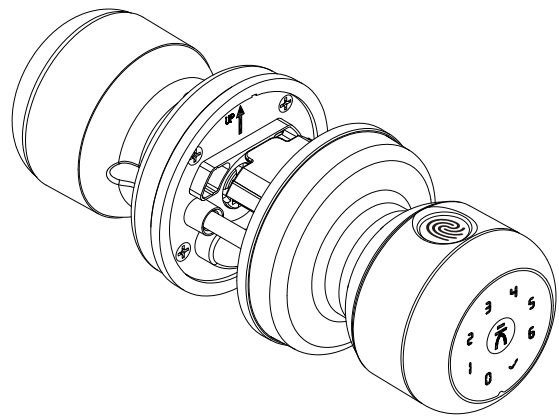

User Manual

Tips: To request for installation tutorial video, please send email with title "K02 Installation Video" and the order number to service@klloque.com

Model : K02


⚠ 4*AAA batteries (Not included)

Warm Tips:


- ① Please check the size of the door and latch carefully before installation.
- ② 4 *AAA batteries aren't included. If the batteries are installed and the door lock doesn't work. Please check it again and make sure the batteries are installed properly.
- ③ Please use manual screw driver to install, electric screw driver is not recommended.
- ④ If the door knob appears to be damaged or does not operate properly, please contact customer service for further assistance.Email: service@klloque.com
- ⑤ It is better to keep at least one key in a secure location as an extra precaution.
- ⑥ Note: The remote unlock can only be done by connecting the gateway, customers need to purchase the gateway separately.
- ⑦ When the fingers are wet, the hands are sticky or not clean, the fingerprints will be hard or even impossible to unlock the door.
- ⑧ After turning the mechanical key about 90 degrees, please turn the knob to open the door.

Part 1 Packing list

Before installation, please check carefully whether the package includes the above items. If there is any item missing, please contact Customer Service.
Email: service@klloque.com

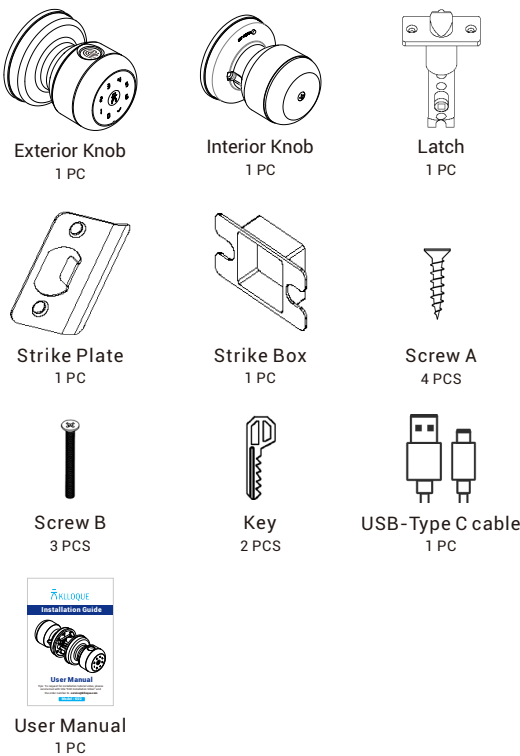

Part 2 Battery Charging

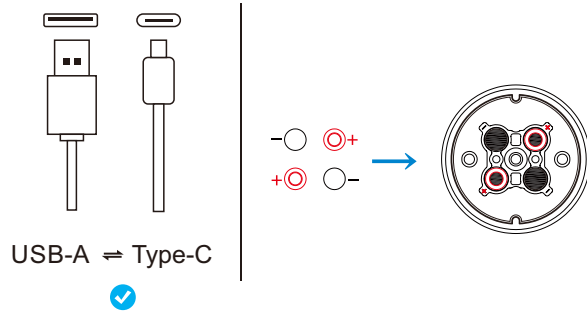


1. The Type-C USB interface is only used for emergency unlock and cannot be used for battery charging. (as the top left figure shows)
2. Please install the batteries correctly according to the positive and negative poles as shown.
3. The USB A+Type C cable is included in the accessory.

Part 3 Installation Guide


Step 1 . Preparing Door

Check the door's dimensions.

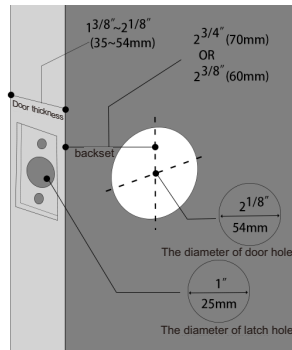

Step 2 . Adjust Latch Backset (If needed)


Measure your door backset, then adjust to the corresponding latch length.

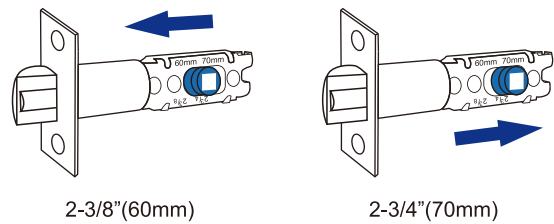


Press the square-shaped hole and pull the latch to set the latch backset to 60mm(2-3/8")or 70mm(2-3/4") to fit your door hole.

Part 3 Installation Guide

Step 3 . Install Latch

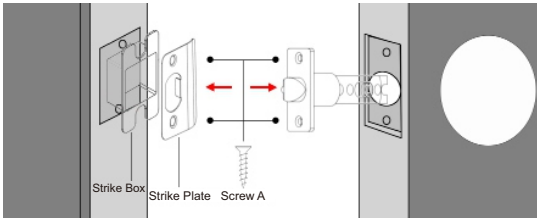

- 1.Insert the latch into the door hole,and tighten Screw A to fix the latch.
- 2.Install strike box and strike plate with screw A into the door frame.

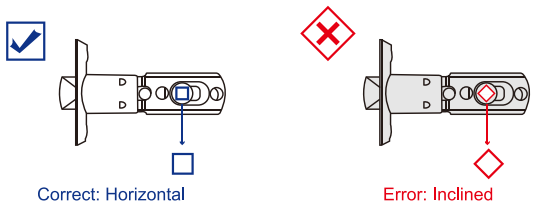

Attention

Check latch's status:

The square hole must be horizontal, otherwise it will get stuck!

Scan the QR code in 30 days and send us the order number to get:

- ▶Free 1-YEAR warranty
- ▶Free replacement for any quality issues
- ▶Installation Video for the product




30-Day
Redemption Validity



Customer Service
Please send email to service@klloque.com


Part 3 Installation Guide

Step 4 . Remove the Battery Cover

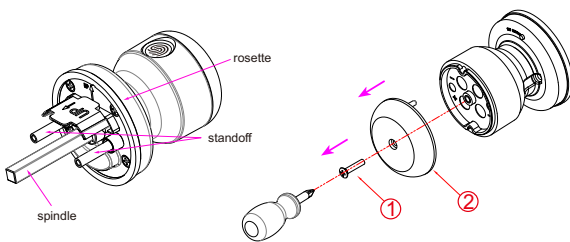

As the left figure shows, use the screwdriver to remove the Screw C and pull out the battery cover.


Step 5 . Install the Exterior Knob



As shown left, install the Exterior Knob onto the door with the stand off going through the circular holes on the Latch, and spindle going through the square-shaped(center)hole.


Part 3 Installation Guide

Step 6 . Install the Interior Knob

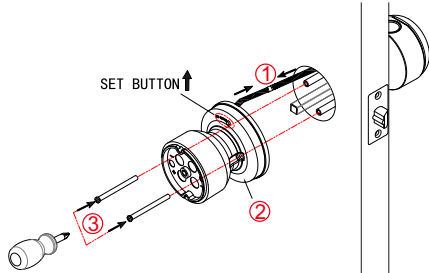

The set button above the rosette should face upward.


1. Plug the control wire male plug to female socket.
2. Install the rosette onto the door with the standoff aligning the circular holes and spindle aligning the square-shaped (center)hole.
3. Insert the Screw B into the circular holes and tighten them to secure the rosette.

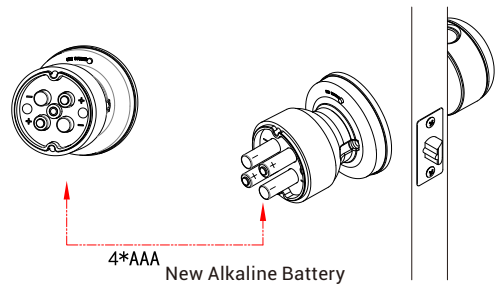


Warm tips:

- 1.PLEASE DO NOT USE LITHIUM BATTERIES OR RECHARGEABLE BATTERIES.
- 2.Please install the battery correctly according to the positive and negative poles as shows.

Part 4 Operation Guide

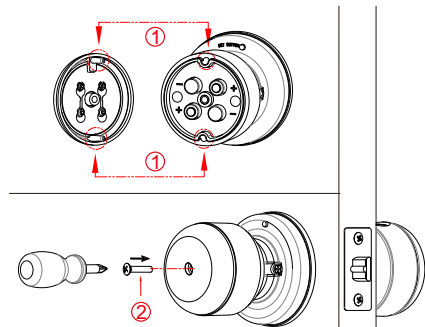

Install 4 AAA battery and tighten the Screw C to secure the battery cover.

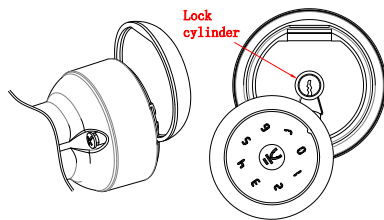


Key To Unlock

1. Press the screw in the back of the Exterior Knob, and the knob head cover will come out for you to easily pull and turn.
2. Pull out the knob head cover, insert the key and turn the key 90° to unlock, then turn the Exterior Knob to open the door.

Low Power Indication

After being unlocked by fingerprint or APP successfully, the buzzer beeps once, and the fingerprint identification area flashes green and then flashes red.

Part 4 Operation Guide



5V Emergency Power

Type-C USB interface is used to connect regular 5V power bank to activate the lock in case the battery is dead.


⚠ Warm tips:

Note: The Type-C USB interface is only used for emergency unlock and cannot be used for battery charging.

Passage Mode

Press the SET BUTTON on the back of Interior Knob once, validate the added fingerprint when the LED indicators will flash blue to enable the passage mode.Or you can disable the auto lock in app to activate the passage mode.

Press the SET BUTTON once to disable the passage mode.Or you can enable the auto lock in app to disable the passage mode.



Restore the Factory Setting

Press the set button for 8 seconds. After that, you will hear the long beep and the fingerprint identification area flashes green.
Any fingerprints can unlock the lock.

Part 5 Technical Parameters


Name	Parameter Description
USB	Type-C/5V2A
Fingerprint Capacity	20
Password Capacity	20
Low power warning	4.8V±0.2
Voltage range	4.5~6.5V
Stand-by current	≤90μA
Working current	≤250mA
Unlock time	≈ 1.5sec
Working temperature	23 °F~131 °F(-5°C ~55°C)

Part 6 Indicator Lights

Action	Buzzer	Indicator
Power on	Beep once	Inactive
Fingerprint added successfully	Long Beep	Stay green for a while
Unlocking successful	Beeps once	Blinks green once
Unlocking failure	Beeps twice	Blinks red once
Low battery warning	Beeps once	Blinks green then blinks red
Resetting successful	Long Beep	Blinks green once



APP Guide

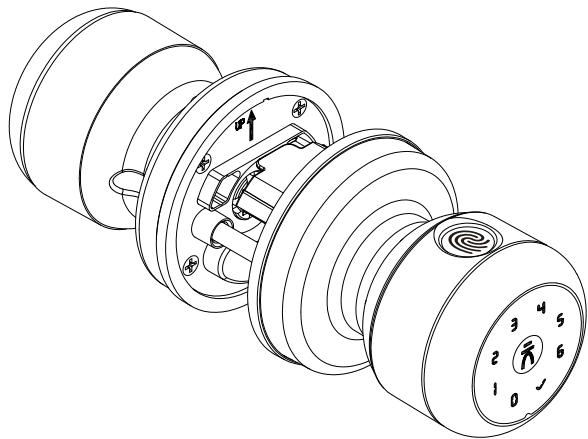


User Manual


Model : K02

Part 1 Pairing your Lock

Step 1 . Download the App

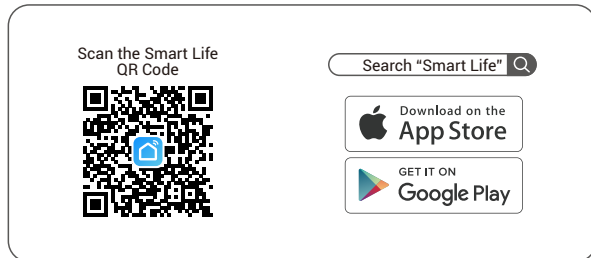


Step 2 . Register or Log in an Account

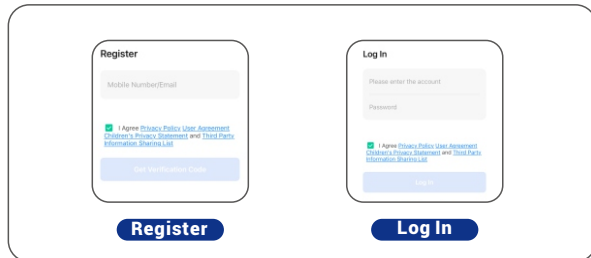


Step 3 . Add Your Lock

A. Enable phone Bluetooth and Wi-Fi or Mobile Network

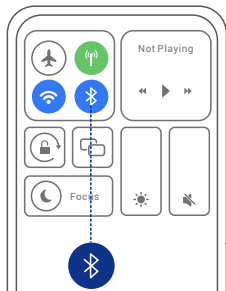

B. Add device

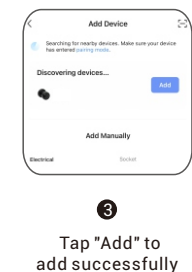

Tap "Add" to add successfully




Warm tips:

If you still can't add a device, check this setting by following the steps below.
* Grant permissions for "Bluetooth" in Smart Life APP.

- 1 Tap "ME"
- 2 Open "Settings"
- 3 Click "Privacy Settings"
- 4 Tap "Bluetooth" to open


Bluetooth
During use, this app needs access to Bluetooth, helping discover nearby Bluetooth devices.

Part 2 Pair the Lock

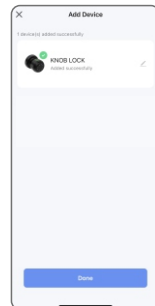

Successful connection! You can click this icon "✓" to rename the lock or just click "Done" to complete the pairing.

Part 3 APP Unlock/Lock

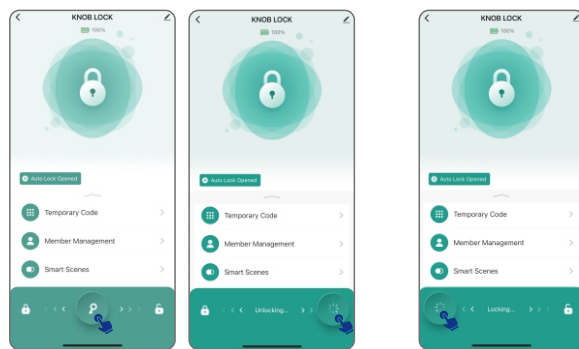

Unlock via Bluetooth
Unlock: Hold and drag the icon "P" to the icon "🔓".

Lock via Bluetooth
Lock: Hold and drag the icon "P" to the icon "🔒".


Part 4 Temporary Code



Dynamic Code: Its validity period is 5 minutes. It can be used multiple times before it expires.

Warm tips:

1. Password Privacy: Save your password as the app won't display it.
2. Please end with "✓" for the correct password entry, or it will fail.
3. If you make a mistake when entering your password, you need to tap "✓" and re-enter it.

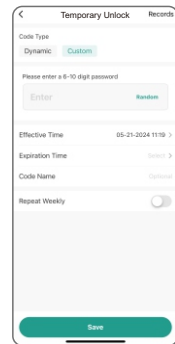


Custom Code: Follow the instructions on page to fill in the blanks. Remember to set the Expiration Time of your password before saving it.


Warm tips:

1. Password Privacy: Save your password as the app won't display it.
2. Please end with "✓" for the correct password entry, or it will fail.
3. If you make a mistake when entering your password, you need to tap "✓" and re-enter it.

Part 5 Member Management

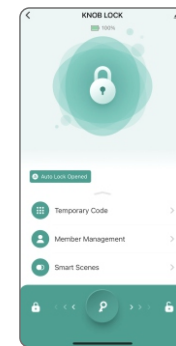

Select "Member Management" and tap "+" to add/share/cancel members.

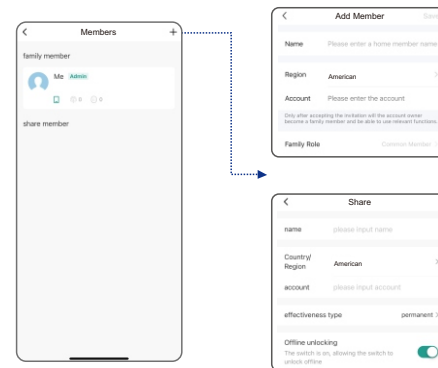


Tap "Add Member"

Or

Tap "Share Member"

Part 6 Fingerprint Input

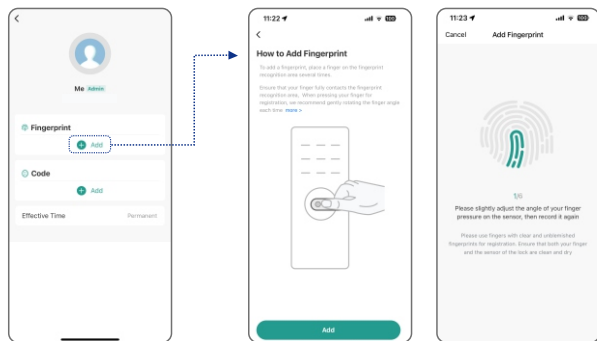


Fingerprint Input: Press "Add" and follow the instructions to add fingerprints.

Warm tips:

1. Please keep your fingers and sensing area clean and dry before inputting your fingerprint.
2. For improving the fingerprint recognition rate of the elderly, children or people with light fingerprints, it is necessary to create more fingerprint files and input different angles of their fingerprints.
3. For your privacy, your fingerprints will be stored in the device only.

Part 7 Code Input

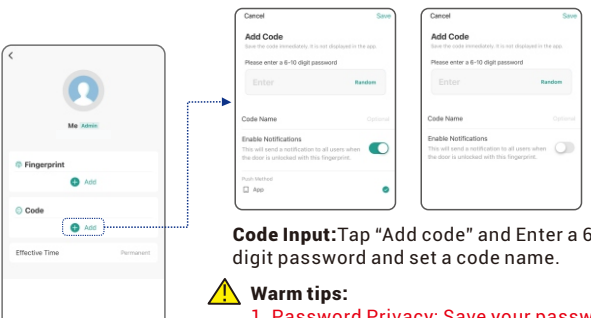


Code Input: Tap "Add code" and Enter a 6-10 digit password and set a code name.

Warm tips:


1. Password Privacy: Save your password as the app won't display it.
2. After you set the password, you must "Save" it to take effect.
3. Please end with "✓" for the correct password entry, or it will fail.

Part 8 Create Smart Scenes

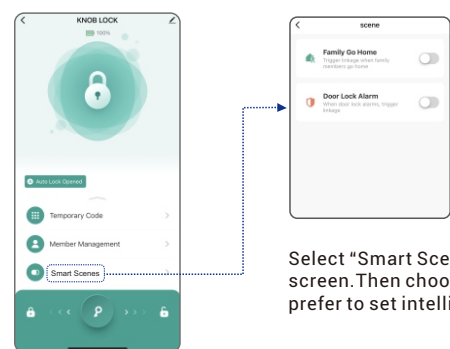

Select "Smart Scenes" on the screen. Then choose the scenes you prefer to set intelligent interactions.


Part 9 More

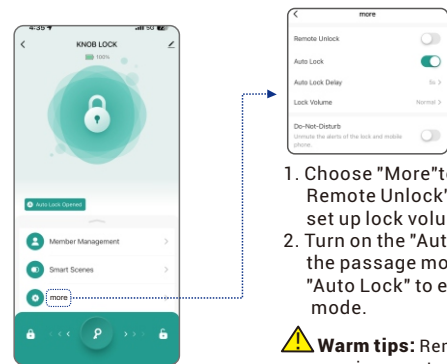

1. Choose "More" to turn on/off "Remote Unlock", "Auto Lock" and set up lock volume.
2. Turn on the "Auto Lock" to disable the passage mode and turn off the "Auto Lock" to enable the passage mode.

Warm tips: Remote unlocking requires a gateway connection.

Part 10 Device Information Set Up

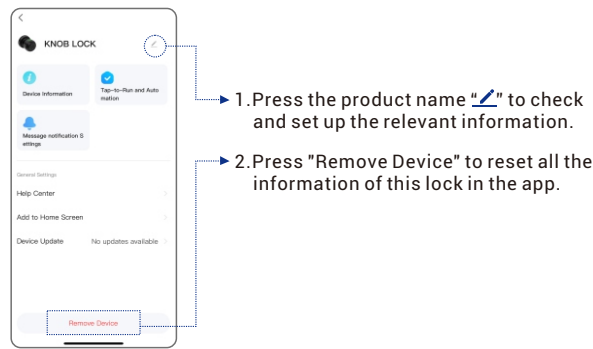

1. Press the product name "KLLOQUE" to check and set up the relevant information.

2. Press "Remove Device" to reset all the information of this lock in the app.

Part 11 Product Features



Fingerprint Unlock



Password Unlock



APP Unlock



Key Unlock



Auto Unlock



Privacy Mode



Passage Mode



Mute Mode



History Log

FAQ

Q: Why can't the door lock recognize my fingerprint well or it failed to unlock with the App?

A: When recording fingerprints, please place your clean and dry finger at different angles and positions to ensure that a larger area is scanned. The old and children may not use their fingerprints effectively, so keep fingers clean before unlocking.
If two apps use Bluetooth to manage one lock at the same time, only one user can connect to control this lock.

Q: If the batteries are completely dead before I replace new batteries, how can I open the door?

A: You can use an emergency power supply to connect to the smart door knob through a USB A+Type C port or use the backup key to open the door.

Q: After installing the new lock, what should I do to pair and set it up?

A: This smart Knob is controlled by the Bluetooth Smart Life app. Please confirm that the Bluetooth and Location permission is turned on for the App. After authorization, you need to touch the fingerprint sensor to wake up the smart lock. If two use APP to manage one lock at the same, only one user can connect to control this lock.

Q: How can I view the passwords I have set or auto-generated in my fingerprint door lock?

A: The APP is currently unable to view passwords that have been set or automatically generated. Please take a screenshot to save them or share them with your family members after generating them and then click 'OK'.

Q: What is the difference between administrator and user?

A: The first user who adds the knob to Smart Life App is the administrator. The admin can manage the fingerprint and password.

Q: Why can't I open the door lock even though I have set the password in the app?

A: Please make sure that after you set the password, you must SAVE it to take effect.

FCC WARNING

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: The equipment has been tested and found to comply with the limits for a Class B digital device. Pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.