

Description

The KLR9650 Series is a low dropout, positive linear regulator with very low quiescent current. It can supply 600mA output current with a input range from 1.7V to 7V, which makes it suitable for all kinds of applications.

KLR9650 Series use advanced CMOS technology to achieve very low dropout voltage (300mV @600mA). Fast structural design achieves 75dB PSRR at 1kHz while still maintaining a small 50uA quiescent current.

Trimming technique is used to guarantee output voltage accuracy within $\pm 2\%$ (Fixed Output); $\pm 1\%$ (Adjustable Output). KLR9650 Series provides full fault protection including current limit, short circuit protection and thermal shutdown protection.

Features

- Fixed Output Voltages :
0.7V, 1.0V, 1.2V, 1.5V, 1.8V, 2.5V, 2.8V, 3.0V, 3.3V, 3.6V, Other output can be customized
- Adjustable Output from 0.6V to (VIN-VDROP)
- Maximum Output Current: 600mA
- Input Voltage Range: 1.7V~7V
- Low Quiescent Current: 50uA (Typ.)
- Very low dropout voltage :
300mV @ 600mA (Vout=3.3V)
- Highly Accurate: $\pm 2\%$ (Fixed Output)
 $\pm 1\%$ (Adjustable Output)
- 0.02%/V Line Regulation
- Auto discharge function
- 75dB PSRR @ 1KHz
- -40°C~125°C Wide Operating Temperature
- 2000V HBM ESD
- 150 °C Thermal Protection

Applications


- Battery powered portable devices
- Smart phone, tablet
- Hi resolution camera sensor power
- Wireless modules
- RF, PLL, VCO clock power

Functional Pin Description

Pin Name	Pin Function
VIN	Power Input Voltage
GND	Ground
EN	Chip Enable (Active High). Note that this pin is high impedance
NC	NO Connected
FB	Feedback Pin (adjustable voltage version only). Connect this pin to the midpoint of an external resistor divider to adjust the output voltage
VOUT	Output Voltage


Marking Code

1.SOT




XX:Output Voltage
e.g. 3.0:3.0V
AJ:ADJ

2.DFN




B:Product Code
XX:Output Voltage
e.g. 30:3.0V


SOT-23




SOT-89




SOT-23-3




SOT-23-5 Fixed




SOT-89-5




DFN1x1-4L Bottom View

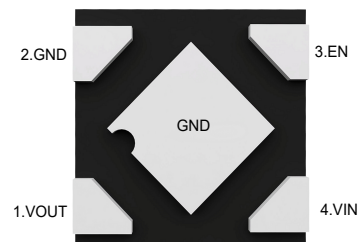

SOT-23-5 ADJ



DFN2x2C-6L Bottom View



Ordering Information

KLR9650 □□□□

Package Type

SA:SOT-23 SC:SOT-23-3

SQ:SOT-89 SR:SOT-89-5

SE:SOT-23-5 DE:DFN1x1-4L

DFC:DFN2x2C-6L

Fixed Output Voltage Version

10 : 1.0V 12 : 1.2V 15 : 1.5V

18 : 1.8V 25 : 2.5V 28 : 2.8V

30 : 3.0V 33 : 3.3V 36 : 3.6V


ADJ: Adjustable Output Voltage Version

Output current tap


M : 600mA

Function Block Diagram(Package in SOT-23-5)

Fixed Output Voltage

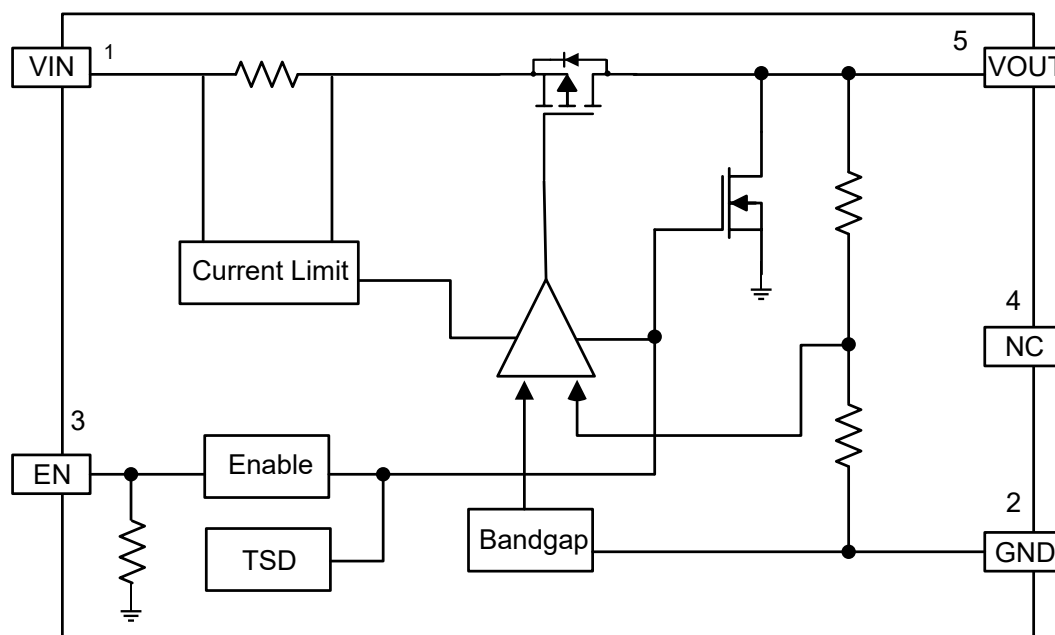


Adjustable Output Voltage

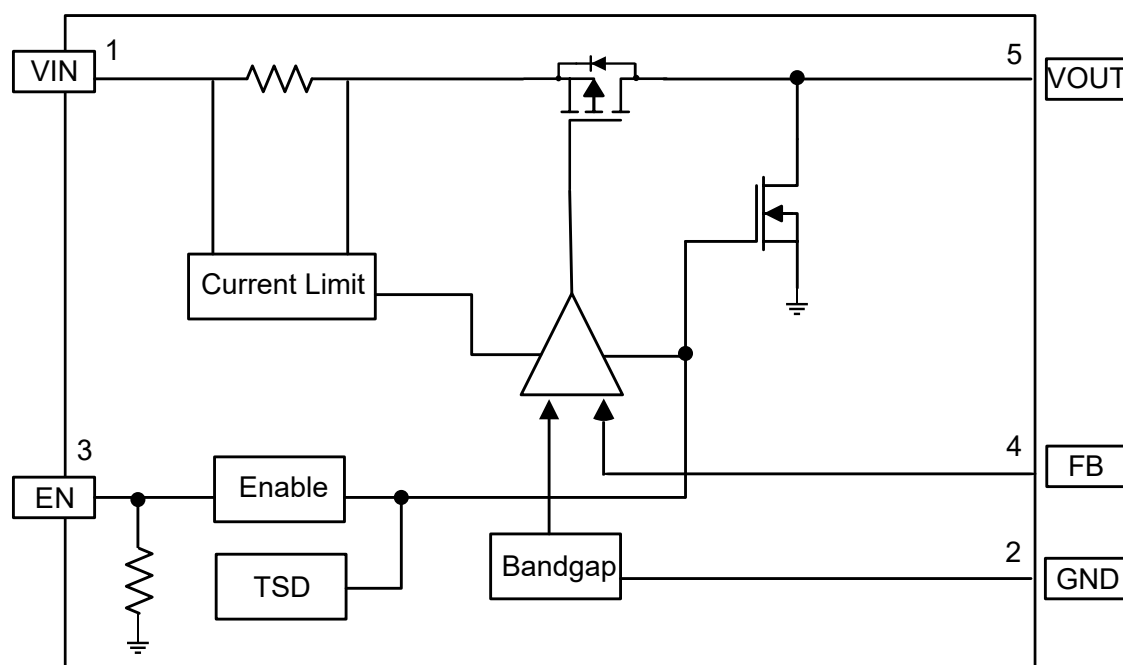


KLR9650 Low Dropout Regulators

Typical Application Circuit

Fixed Output Voltage

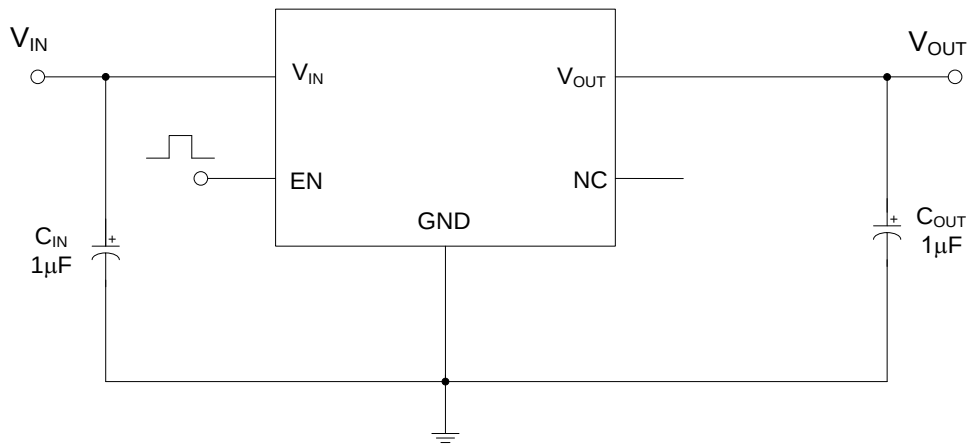

Adjustable Output Voltage

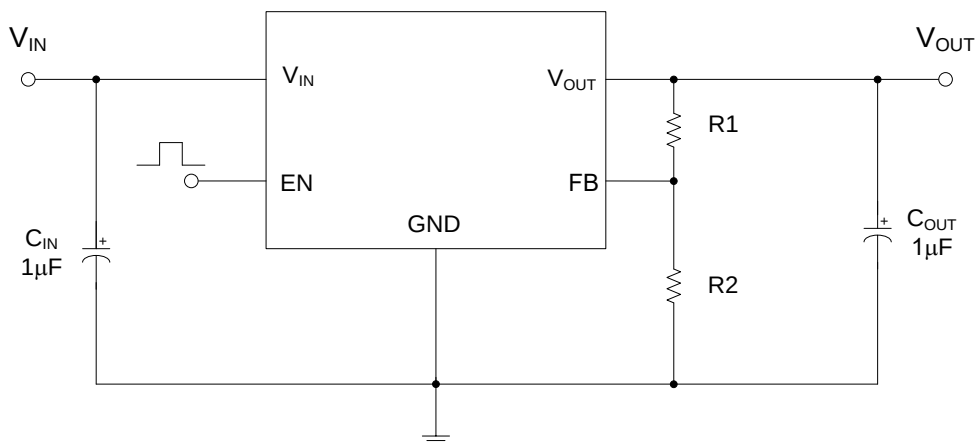

Note:

1. Input capacitor ($C_{IN}=1\mu F$) and Output capacitor ($C_{OUT}=1\mu F$) are recommended in all application circuit.
2. $V_{OUT}=V_{FB} \times (1+R1/R2)$, $V_{FB}=0.6V$.

Absolute Maximum Ratings

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter		Value	Unit
Maximum Input Voltage		8.5	V
Output Current		600	mA
Power Dissipation	SOT-23	350	mW
	SOT-89	590	mW
	SOT-23-3	450	mW
	SOT-23-5	450	mW
	DFN1x1-4L	550	mW
Thermal Resistance,Junction-to-Ambient	SOT-23	280	°C/W
	SOT-89	170	°C/W
	SOT-23-3	220	°C/W
	SOT-23-5	220	°C/W
	DFN1x1-4L	180	°C/W
Maximum Junction Temperature		150	°C
Operating Ambient Temperature		-40 ~ +125	°C
Storage Temperature Range		-55~ +150	°C
Lead Temperature&Time		260°C,10S	--

Note1: Exceed these limits to damage to the device. Exposure to absolute maximum rating conditions may affect.

Recommended Operating Conditions

Parameter	Value	Unit
Supply Voltage	1.7~7	V
Maximum Output Current	600	mA
Operating Ambient Temperature	-40 ~ +125	°C

KLR9650 Low Dropout Regulators

Electrical Characteristics







$C_{IN}=1\mu F$, $C_{OUT}=1\mu F$, $T_A=25^\circ C$, unless otherwise noted.)

Parameter		Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Input Voltage		V _{IN}		1.7	--	7	V
Output Voltage Range		V _{OUT}	V _{IN} =V _{OUT} +1V 1mA<I _{OUT} <30mA	V _{OUT} ×0.98	--	V _{OUT} ×1.02	V
Feedback Voltage		V _{FB}	Adjustable Output Version	--	0.6	--	V
Output Voltage Accuracy		ΔV _{OUT}	Fixed Output Version	-2	--	+2	%
			Adjustable Output Version	-1	--	+1	%
Quiescent Current		I _Q	I _{OUT} =0mA	--	50	75	μA
Max. Output Current		I _{OUT} (Max.)	V _{IN} -V _{OUT} =1V	600	--	--	mA
Dropout Voltage		V _{DROP}	V _{OUT} =3.3V, I _{OUT} =600mA	--	300	500	mV
Line Regulation		ΔV _{LINE}	I _{OUT} =1mA	--	0.02	0.1	%/V
Load Regulation		ΔV _{LOAD}	0mA≤I _{OUT} ≤600mA	--	15	30	mV
Short Circuit Current		I _{SHORT}		--	250	--	mA
Current Limit		I _{LIM}	V _{IN} -V _{OUT} =1V	0.7	0.75	--	A
Standby Current			EN=0	--	--	1	μA
EN Input Threshold	Logic Low	V _{CEL}	EN Low Voltage	--	--	0.4	V
	Logic High	V _{CEH}	EN High Voltage	1	--	--	V
Power Supply Rejection Rate		PSRR	V _{IN} =V _{OUT} +0.5V, f=1KHz,I _{OUT} =10mA	--	75	--	dB
Startup Time		t _{start}		--	80	--	μS
Output Voltage Temperature Coefficient		TC _{VOUT}		-100	--	100	ppm/°C
OTP				130	150	170	°C
OTP Hysteresis				--	40	--	°C

Note: All test are conducted under ambient temperature $25^\circ C$ and within a short period of time 20ms.








Typical Electrical Curves

Test conditions: $V_{EN}=V_{IN}$, $C_{IN}=C_{OUT}=1\mu F$, all typical values are at $T_A=25^\circ C$ (unless otherwise noted)

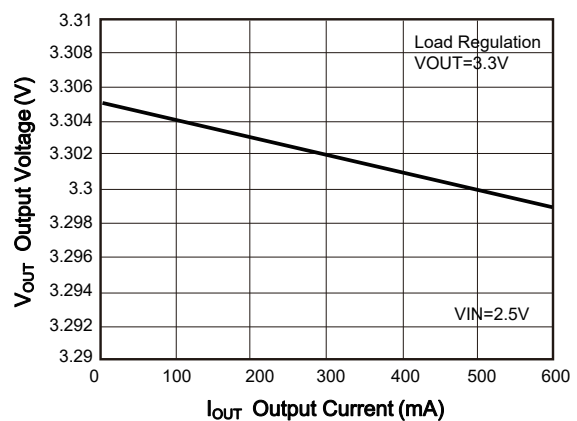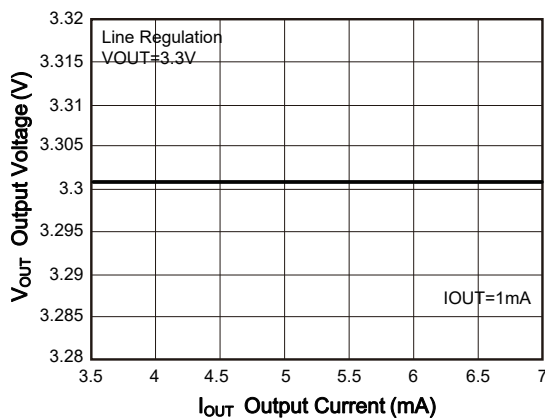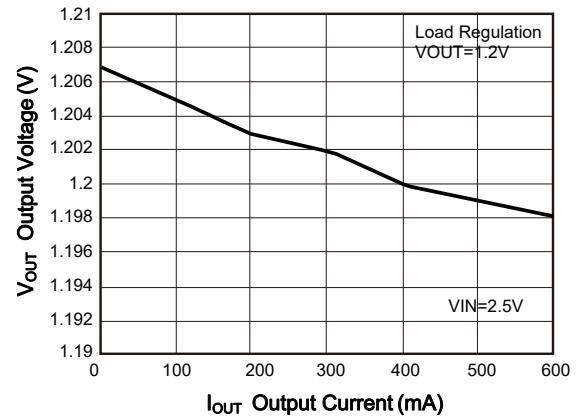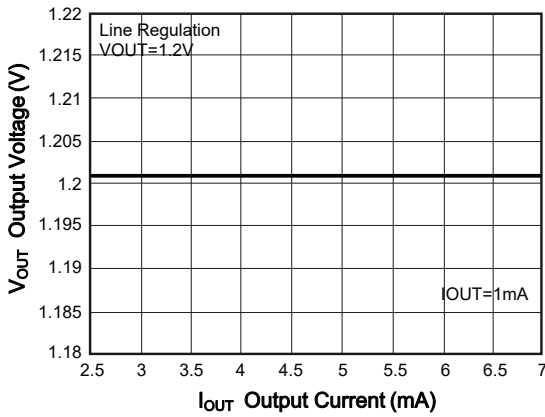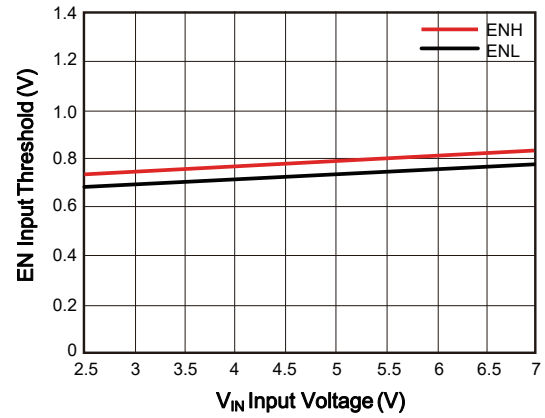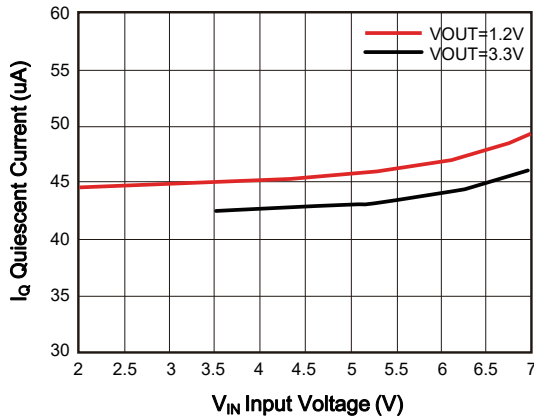

Typical Electrical Curves


Test conditions: $V_{EN}=V_{IN}$, $C_{IN}=C_{OUT}=1\mu F$, all typical values are at $T_A=25^\circ C$ (unless otherwise noted)

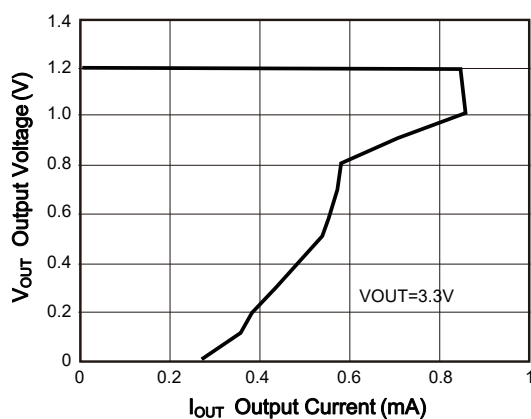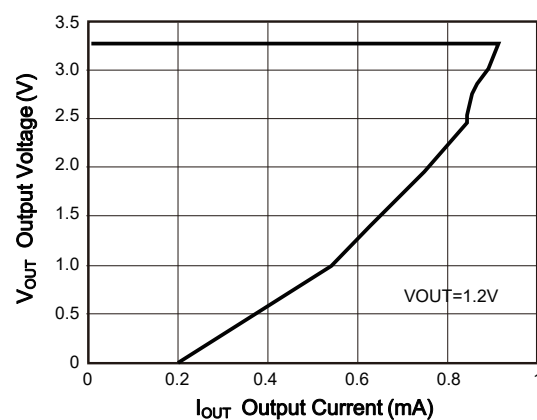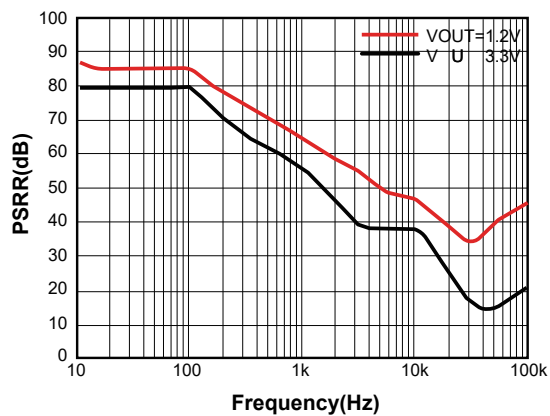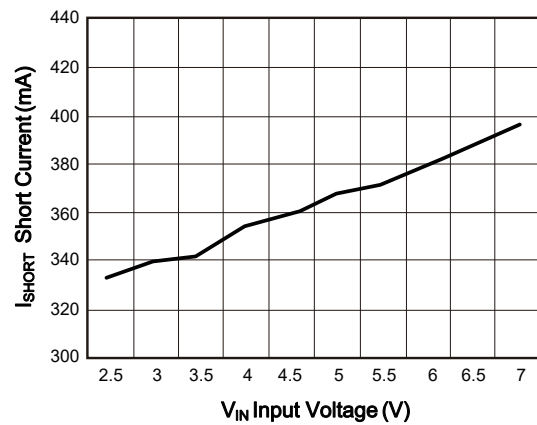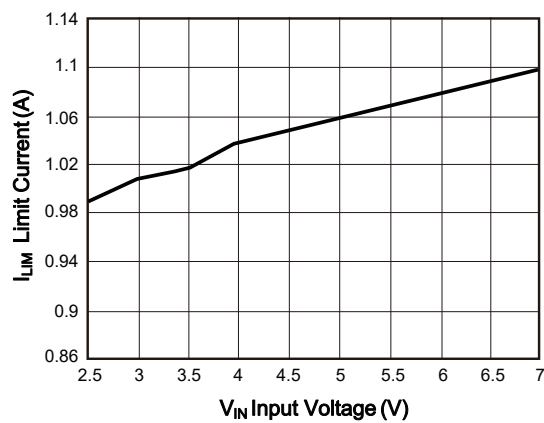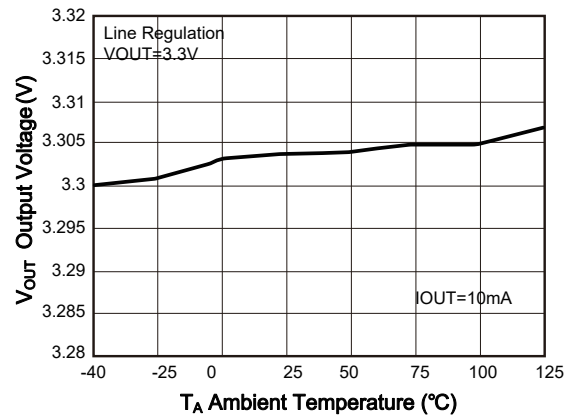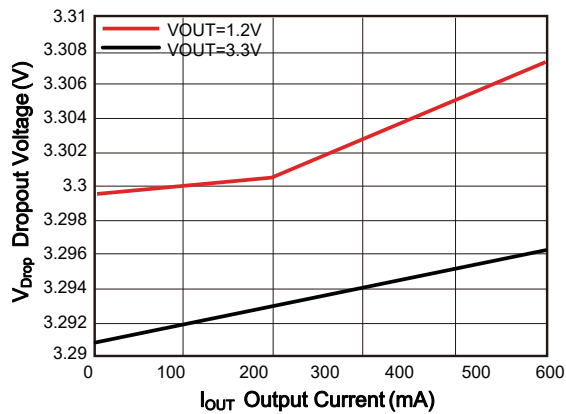


KLR9650 Low Dropout Regulators

Typical Electrical Curves


Test conditions: $V_{EN}=V_{IN}$, $C_{IN}=C_{OUT}=1\mu F$, all typical values are at $T_A=25^\circ C$ (unless otherwise noted)

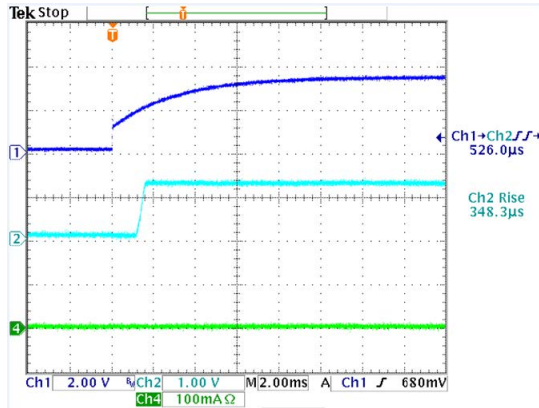


Power ON(VOUT=1.2V)

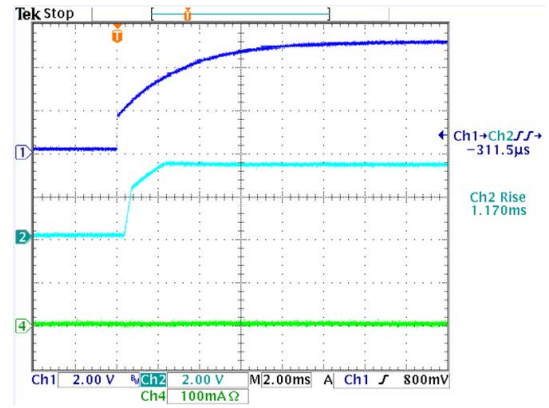


Power ON(VOUT=3.3V)

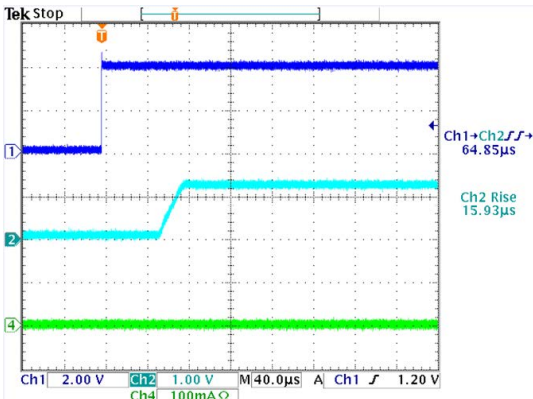


EN ON(VOUT=1.2V)

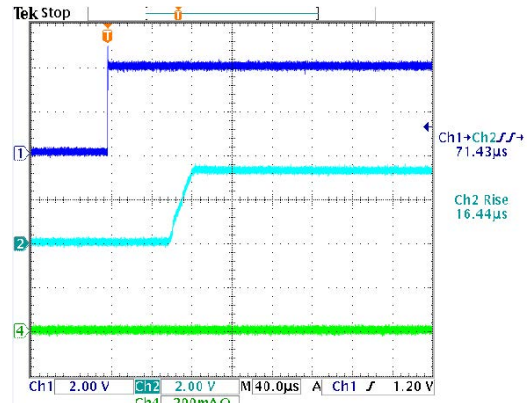

EN ON(VOUT=3.3V)

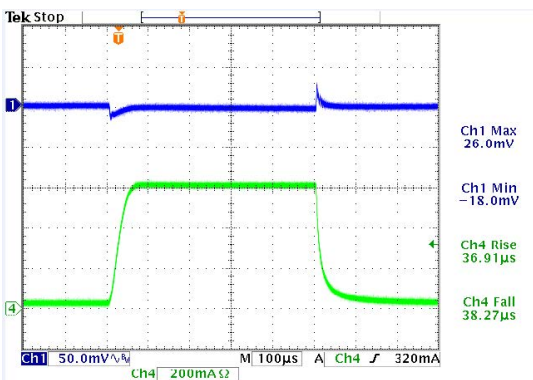

Load Transient VOUT=1.2V,VIN=3.3V

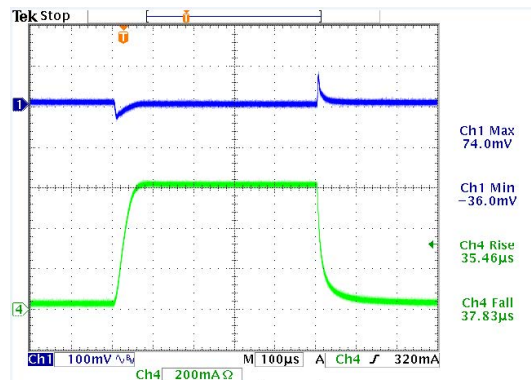

Load Transient VOUT=3.3V,VIN=5V

Function Descriptions

A minimum of 1 μ F capacitor must be connected from Vout to ground to insure stability. Input capacitor of 1 μ F is recommended to ensure the input voltage does not sag below the minimum dropout voltage during load transient event. Vin pin must always be dropout voltage higher than Vout in order for the device to regulate properly.

Application Information

KLR9650 Series requires input and output decoupling capacitors. The device is specifically designed for portable applications requiring minimum board space and smallest components. These capacitors must be correctly selected for good performance. Please note that linear regulators with a low dropout voltage have high internal loop gains, which require care in guarding against oscillation caused by insufficient decoupling capacitors.

Capacitor Selection

Normally, use a 1 μ F capacitor on the input and a 1 μ F capacitor on the output of the KLR9650 Series. Larger input capacitor values and lower ESR (X5R, X7R) provide better supply noise rejection and transient response. A higher value output capacitor (2.2 μ F) may be necessary if large, fast transients are anticipated and the device is located several inches from the power source.

Input-Output (Dropout) Voltage

A regulator's minimum input-to-output voltage differential (dropout voltage) determines the lowest usable supply voltage. In battery-powered systems, this determines the useful end-of-life battery voltage. Because the device uses a PMOS, its dropout voltage is a function of drain to source on resistance, RDS (on), multiplied by the load current:

$$VDROP = VIN - VOUT = RDS (on) \times IOUT$$

Current Limit and Thermal Shutdown Protection

In order to prevent overloading or thermal condition from damaging the device, KLR9650 Series has internal thermal and current limiting functions designed to protect the device. It will rapidly shut off PMOS pass element during overloading or over temperature condition.

Thermal Considerations

The KLR9650 Series can deliver a current of up to 300mA over the full operating junction temperature range. However, the maximum output current must be controlled at higher ambient temperature to ensure the junction temperature does not exceed 150°C. With all possible conditions, the junction temperature must be within the range specified under operating conditions. Power dissipation can be calculated based on the output current and the voltage drop across regulator.

$$PD = (VIN - VOUT) \times IOUT$$

The final operating junction temperature for any set of conditions can be estimated by the following thermal equation:

$$PD (max) = (Tj (max) - Ta) / R\theta JA$$

Where Tj (max) is the maximum junction temperature of the die (150°C) and Ta is the maximum ambient temperature.

PCB Layout





An input capacitance of $\approx 1 \mu F$ is required between the KLR9650 Series input pin and ground (the amount of the capacitance may be increased without limit), this capacitor must be located a distance of not more than 1cm from the input and return to a clean analog ground. Input capacitor can filter out the input voltage spikes caused by the surge current due to the inductive effect of the package pin and the printed circuit board's routing wire. Otherwise, the actual voltage at the Vin pin may exceed the absolute maximum rating. The output capacitor also must be located a distance of not more than 1cm from output to a clean analog ground. Because it can filter out the output spike caused by the surge current due to the inductive effect of the package pin and the printed circuit board's routing wire.

KLR9650 Low Dropout Regulators

Package Outline

SOT-23

Dimensions in mm

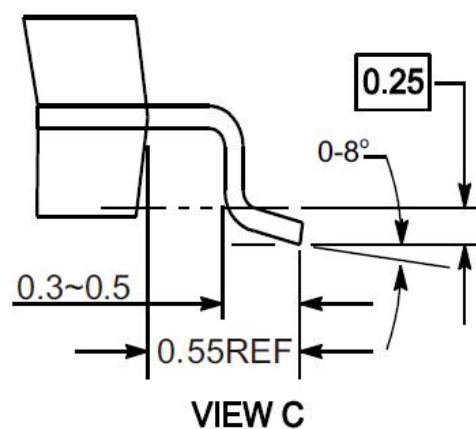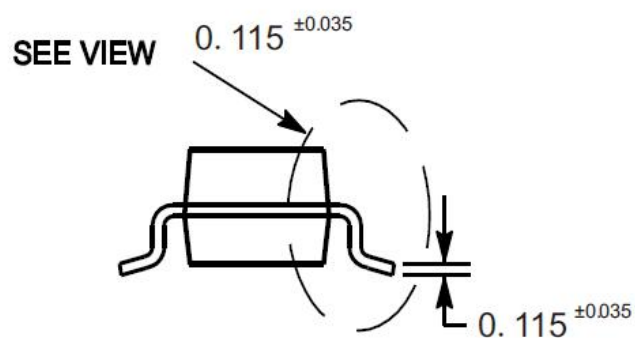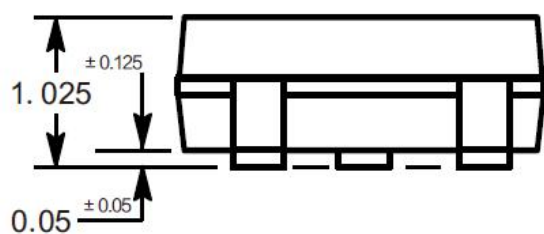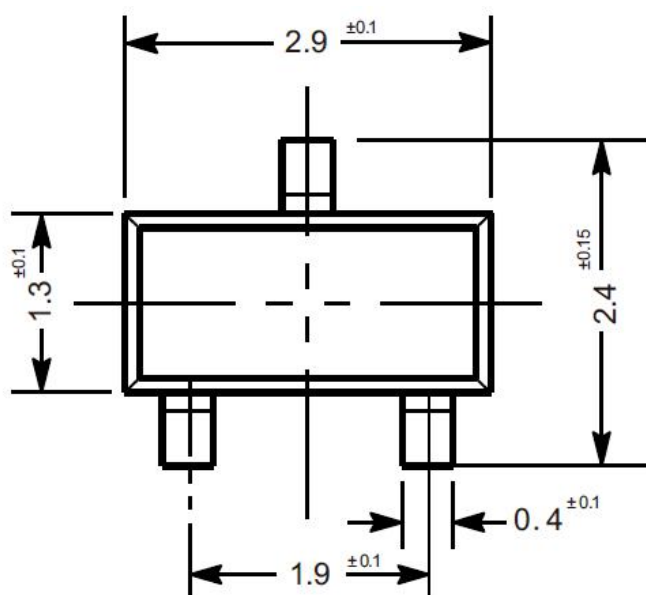


KLR9650 Low Dropout Regulators

Package Outline

SOT-89

Dimensions in mm



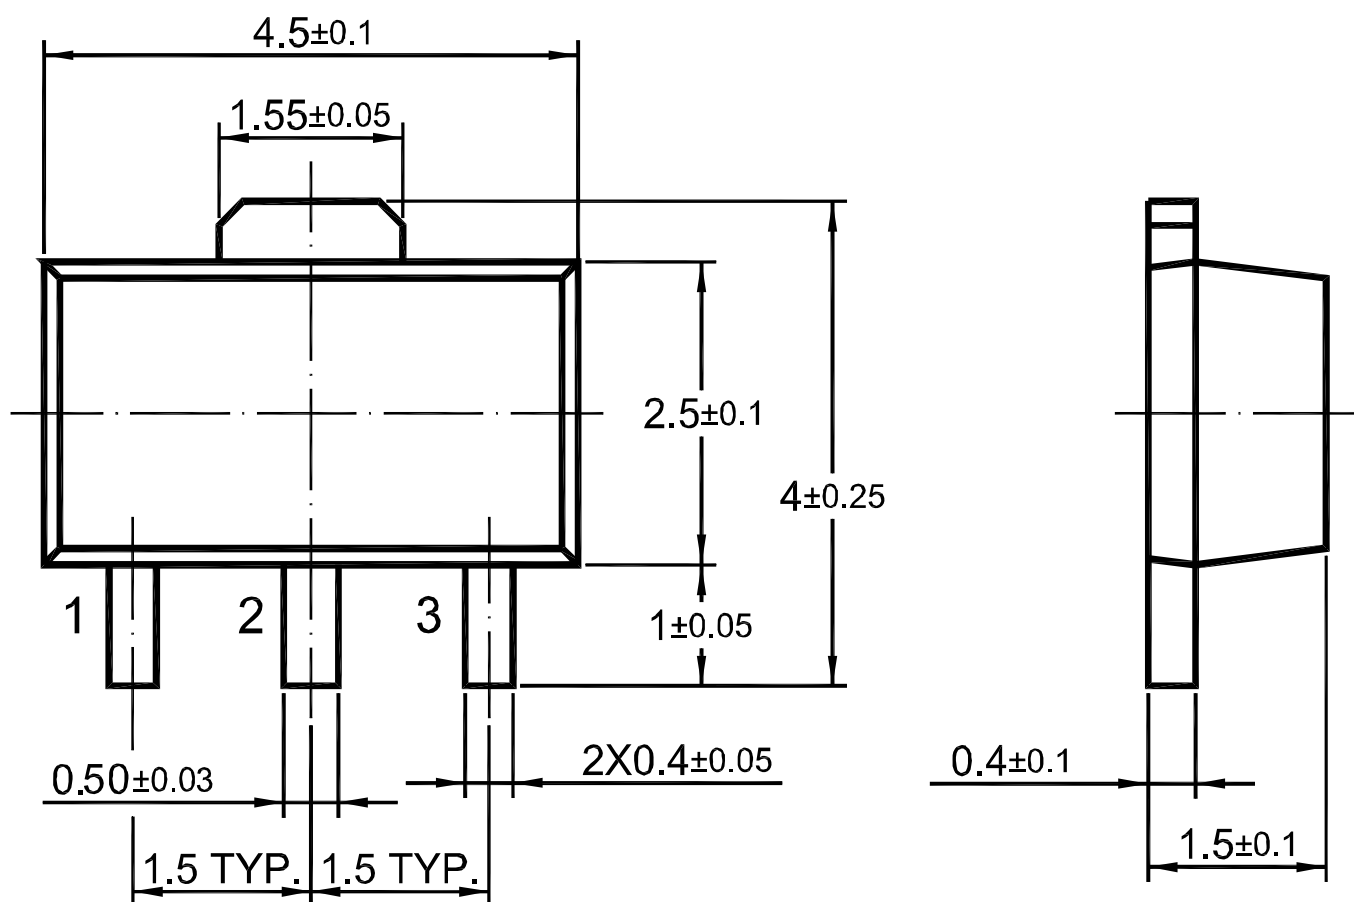


Dimensions in mm

Package Outline

SOT-23-3




Dimensions in mm

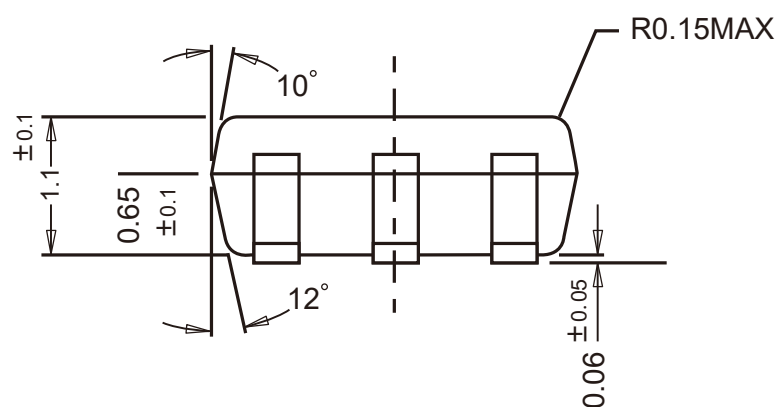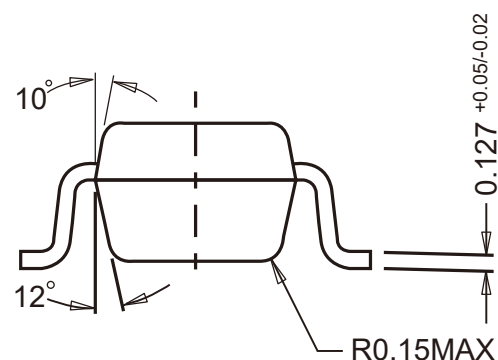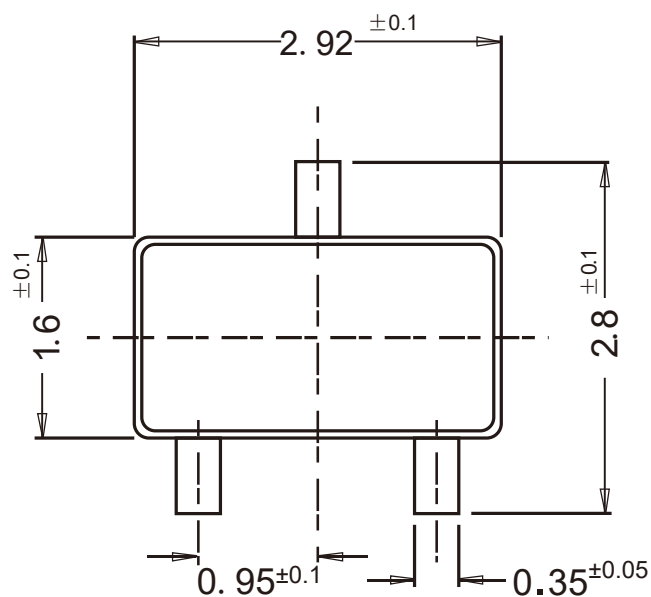

Package Outline

SOT-23-5




Dimensions in mm

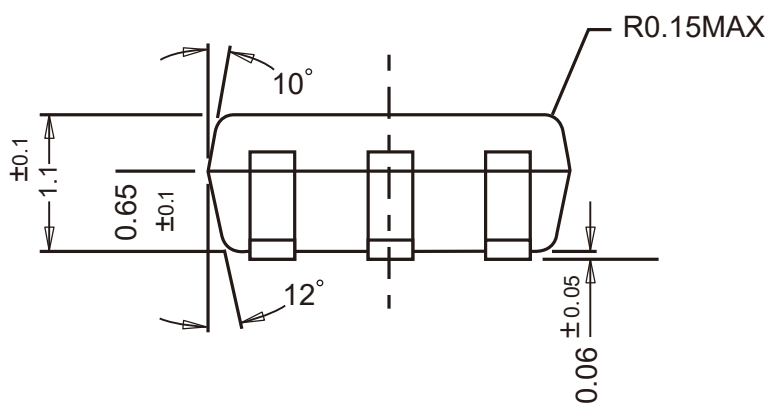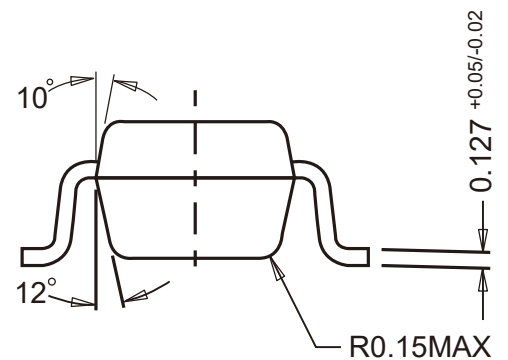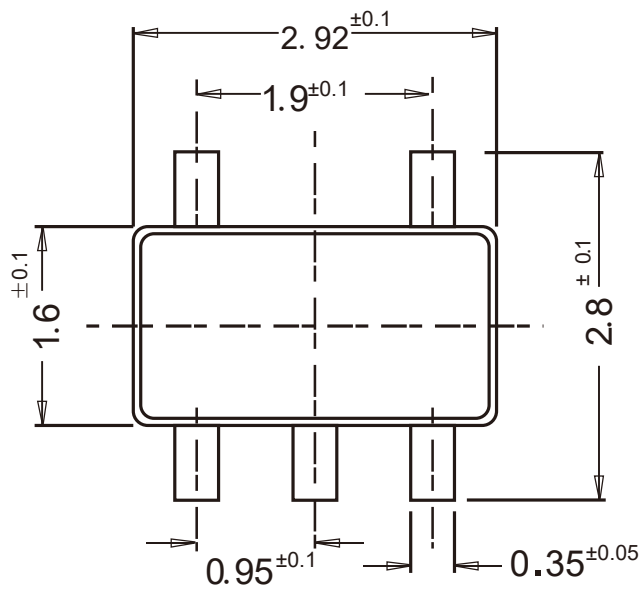

Package Outline

DFN1x1-4L


Dimensions in mm

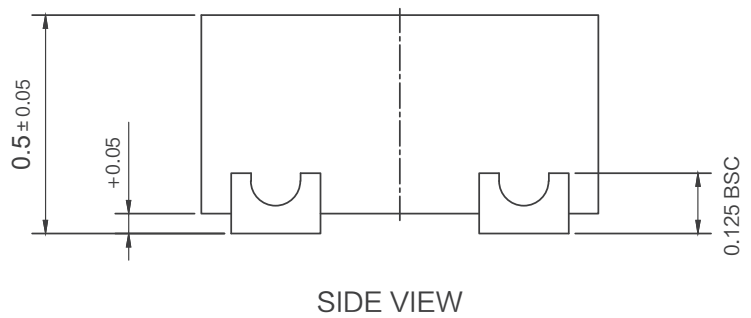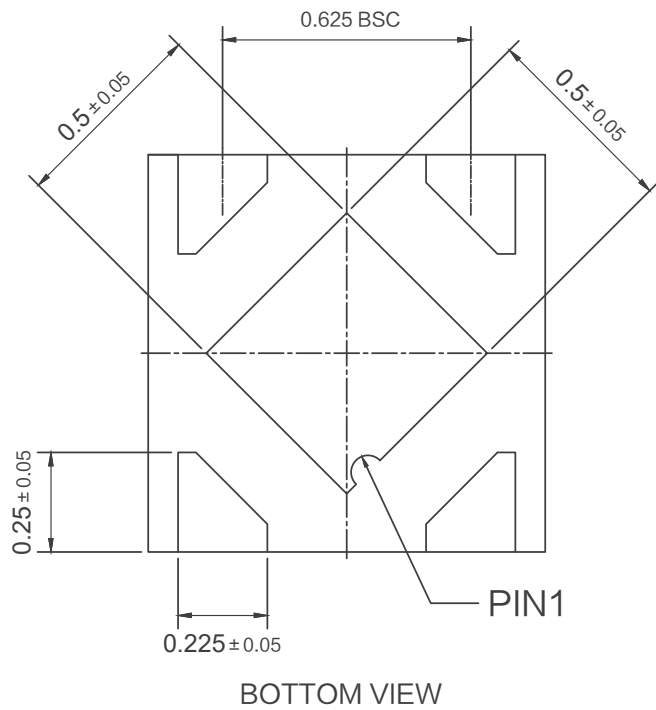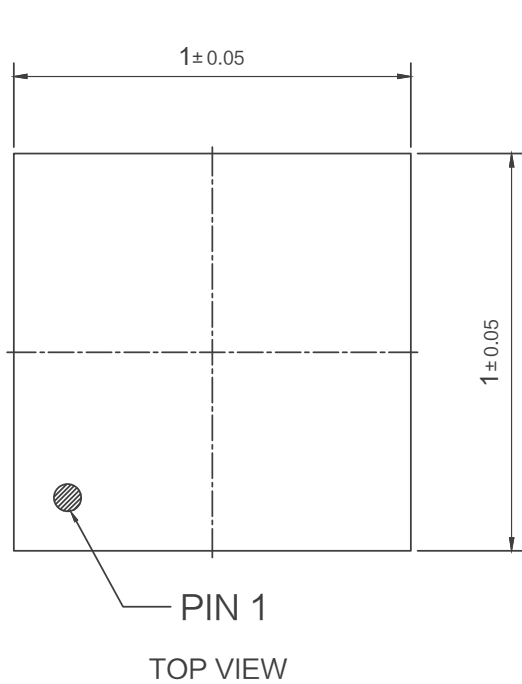


Package Outline

DFN2x2-6L-0006

Dimensions in mm

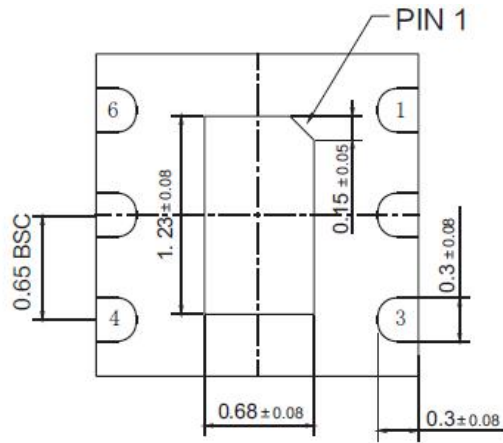

BOTTOM VIEW

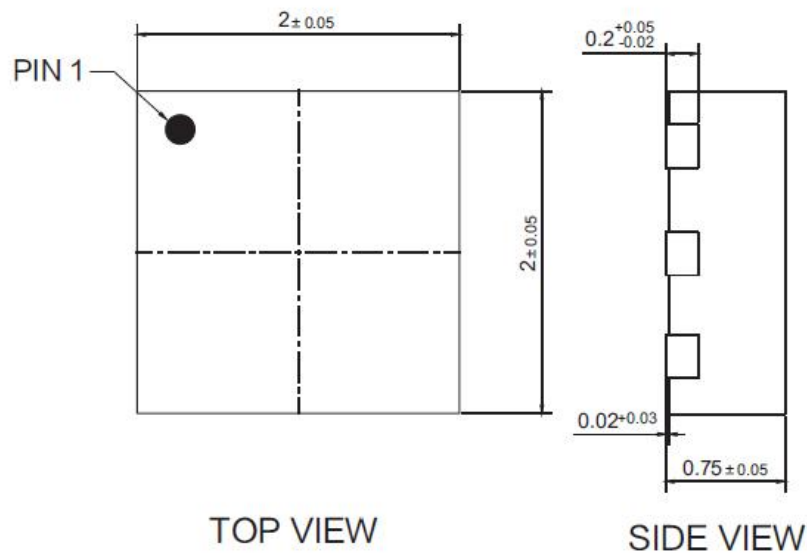

TOP VIEW

SIDE VIEW