


HDL-Mini Box Metallized Polyester Film Capacitors (P=5mm)

Features:

Non-inductively wound with metallized polyester film as dielectric/electrode with copper-clad steel leads and encapsulated in a plastic case sealed with epoxy resin.
 Compact Size, Wide capacitance range, Small size
 Long life due to self-healing property
 Widely used in filter, noise suppression and low pulse circuits

Specifications:

Rated Voltage: 63V, 100V, 250V, 400V
 Capacitance Range: 0.001 μ F ~2.2 μ F
 Operating Temperature: 40/85/21
 Capacitance Tolerance: +/-5%(J), +/-10%(K)
 Voltage Proof: 1.4UR(5S)
 Dissipation Factor: $\leq$ 1.0% (20°C, 1KHz)

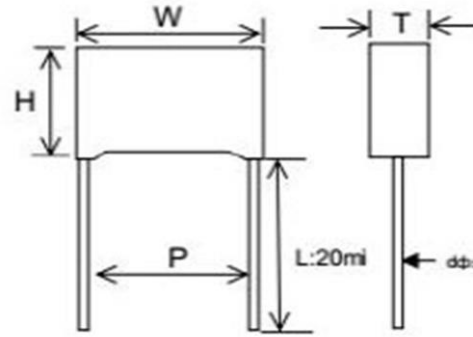

Pitch=5mm

Size: mm

Cap (μ F)	63VDC			100VDC			250VDC			400VDC			Cap (μ F)	63VDC			100VDC		
	W	H	T	W	H	T	W	H	T	W	H	T		W	H	T	W	H	T
0.001	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	0.15				7.2	7.5	3.5
0.0012	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	0.15	7.2	7.5	3.5	7.2	9.5	4.5
0.0015	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	0.18				7.2	7.5	3.5
0.0018	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	0.18	7.2	7.5	3.5	7.2	9.5	4.5
0.0022	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	0.22	7.2	6.5	2.5	7.2	6.5	2.5
0.0027	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	0.22	7.2	7.5	3.5	7.2	7.5	3.5
0.0033	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	0.22				7.2	10.0	5.0
0.0047	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	0.33	7.2	7.5	3.5	7.2	9.5	4.5
0.0056	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	0.33	7.2	9.5	4.5	7.2	11.0	6.0
0.0068	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	0.47	7.2	7.5	3.5	7.2	10.0	5.0
0.0082	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	0.47	7.2	10.0	5.0	7.2	11.0	6.0
0.01	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	0.56	7.2	9.5	4.5	7.2	10.0	5.0
0.012	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5	0.56	7.2	10.0	5.0	7.2	11.0	6.0
0.015	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5	0.68	7.2	9.5	4.5	7.2	11.0	6.0
0.018	7.2	6.5	2.5	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5	0.68	7.2	11.0	6.0			
0.022	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	10.0	5.0	0.82	7.2	9.5	4.5			
0.027	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	11.0	6.0	0.82	7.2	11.0	6.0	7.2	11.0	6.0
0.033	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	11.0	6.0	1	7.2	10.0	5.0	7.2	10.0	5.0
0.039	7.2	6.5	2.5	7.2	6.5	2.5	7.2	7.5	3.5	7.2	11.0	6.0	1	7.2	11.0	6.0	7.2	11.0	6.0
0.047	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5	7.2	11.0	6.0	1.5	7.2	11.0	6.0			
0.056	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5										
0.068	7.2	6.5	2.5	7.2	6.5	2.5	7.2	9.5	4.5										
0.082	7.2	6.5	2.5	7.2	6.5	2.5	7.2	10.0	5.0										
0.1	7.2	6.5	2.5	7.2	6.5	2.5	7.2	10.0	5.0	7.2	11.0	6.0							
0.1				7.2	7.5	3.5													
0.12				7.2	6.5	2.5													
0.12	7.2	6.5	2.5	7.2	9.5	4.5	7.2	11.0	6.0										