

Features

Non-inductively wound with metallized polypropylene film as dielectric/electrode with copper-clad steel leads and encapsulated in a plastic case sealed with epoxy resin.

Very low loss at high frequency

High insulation resistance, long life due to self-healing characteristic

As an across-the-line type noise suppression capacitor

General Specification

Rated voltage:


Capacitance Range:

Capacitance Tolerance:

Operating Temp: 40/110/56

Voltage Proof: 4.3UR(5S)

Dissipation Factor: $\leq 0.3\%$ (20°C, 10kHz)

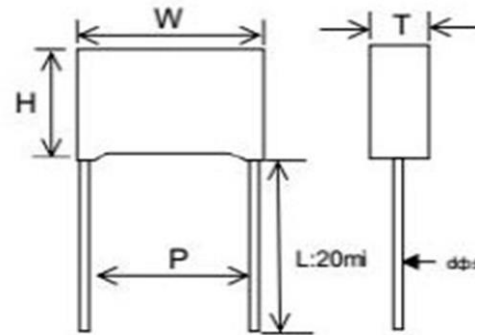

Size table (mm)

CAP(μ F)	W ± 1	H ± 1	T ± 1	P ± 1.0	CAP(μ F)	W ± 1	H ± 1	T ± 1	P ± 1.0
0.0047	13	11	5	10	0.33	18	12	6	15
0.0056	13	11	5	10	0.33	26.5	17	8.5	22.5
0.0068	13	11	5	10	0.47	18	16	11	15
0.0082	13	11	5	10	0.47	26.5	19	10	22.5
0.01	13	11	5	10	0.47	31.5	19.5	11	27.5
0.015	13	11	5	10	0.56	18	21	12	15
0.022	13	11	5	10	0.56	26.5	19	10	22.5
0.022	18	11	5	15	0.56	31.5	19.5	11	27.5
0.033	13	11	5	10	0.68	18	21	12	15
0.033	18	11	5	15	0.68	26.5	19	10	22.5
0.047	18	11	5	15	0.68	31.5	19.5	11	27.5
0.047	18	11	5	15	0.82	26.5	21.5	12	22.5
0.056	13	12	6	10	0.82	31.5	19.5	11	27.5
0.056	18	11	5	15	1	26.5	21.5	12	22.5
0.068	13	12	6	10	1.5	32	26	18	27.5
0.068	18	11	5	15	2.2	32	31	22	27.5
0.082	13	12	6	10					
0.082	18	11	5	15					
0.1	13	12	6	10					
0.1	18	12	6	15					
0.15	13	12	6	10					
0.15	18	13.5	7.5	15					
0.15	26.5	15	6	22.5					
0.22	13	12	6	10					
0.22	18	12	6	15					
0.22	26.5	16.5	7	22.5					