



Lead Cutting and Forming

With Terminals or Forms as below, Easier Inserting the Units into P.C. Board and Contributing to Higher Mounting Efficiency.


SHAPE (S)



SHAPE (C)

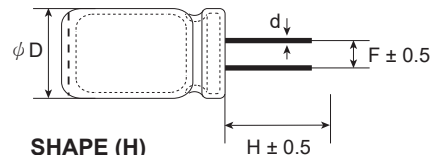


SHAPE (D)

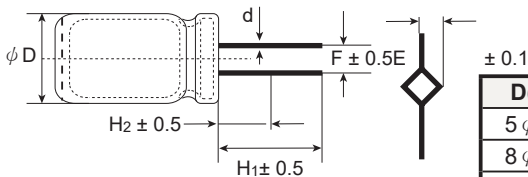


D(mm)	E(mm)
5 ϕ - 6.3 ϕ	1.12
8 ϕ - 18 ϕ	1.32
20 ϕ - 25 ϕ	1.50


SHAPE (H)

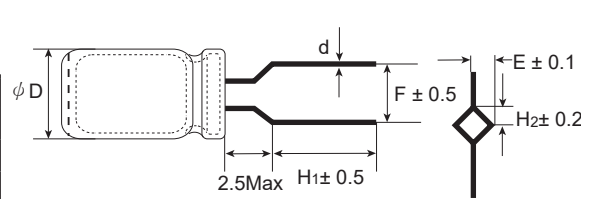


SHAPE (F)

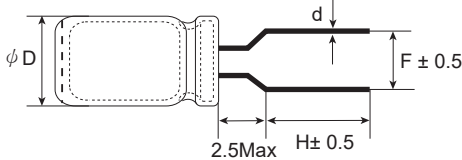


SHAPE (B)

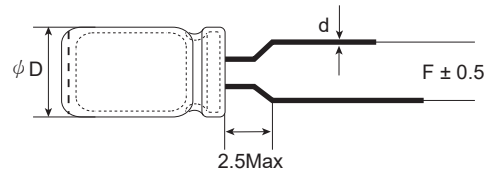

SHAPE (Z)



SHAPE (L)



SPECIFICATION INFORMATION

Shape No.	Cutting & Forming Methods	D ϕ	4 ϕ	5 ϕ	6.3 ϕ	8 ϕ	10 ϕ	12.5 ϕ	13 ϕ	16 ϕ	18 ϕ	22 ϕ
S	Long Lead	F	1.5	2.0	2.5	3.5	5	5	5	7.5	7.5	10
		d	0.45	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.8	0.8
C	Lead Cut Only	F	1.5	2.0	2.5	3.5	5.0	5.0	5.0	7.5	7.5	10.0
		H	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
		d	0.45	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.8	0.8
D	Lead Cut and Crimp	F	—	—	—	—	5.0	5.0	5.0	7.5	7.5	10
		H ₁	—	—	—	—	5.0	5.0	5.0	5.0	5.0	5.0
		H ₂	—	—	—	—	1.8	1.8	1.8	1.8	1.8	1.8
F	Lead Cut and Form	F	5.0	5.0	5.0	5.0	—	—	—	—	—	—
		H	4.0	5.0	5.0	5.0	—	—	—	—	—	—
		d	0.45	0.5	0.5	0.5	—	—	—	—	—	—
H	Lead Cut, Crimp and Form	F	5.0	5.0	5.0	5.0	—	—	—	—	—	—
		H ₁	4.0	5.0	5.0	5.0	—	—	—	—	—	—
		H ₂	1.8	1.8	1.8	1.8	—	—	—	—	—	—
B	Forming Only	d	0.45	0.5	0.5	0.5	0.6	0.6	0.6	0.8	0.8	0.8
		F	1.5	2.0	2.5	3.5	5	5	5	7.5	7.5	10
L / Z	Lead Cutting and Bending	L ₁	2.2	2.7	3.4	4.5	5.3	6.6	6.8	8.4	9.4	11.4
		L ₂	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
		d	0.45	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.8	0.8