

IES TM-21 Lumen Maintenance Result Report

Report Number.....: KEYS24042615002LD-01

Date of issue.....: May 24, 2024

Total number of pages..... 9 pages

Tested by (name + signature).....: Sunny Li

Approved by (name + signature)....: Jason Zhan



Testing Laboratory Name.....: Guangdong KEYS Testing Technology Co., Ltd.

Address.....: Building 1, No.18, Shihuan Road, Dongcheng Subdistrict,
Dongguan, Guangdong, China

Applicant's name.....: ZHONGSHAN Y-CHEN LIGHTING TECHNOLOGY CO.LTD

Address.....: 6F,01B,No.28, Kanglong N0.3Rd, Xinmao Industrial,
Henglan Town, Zhongshan City

Manufacturer's name.....: ZHONGSHAN Y-CHEN LIGHTING TECHNOLOGY CO.LTD

Address.....: 6F,01B,No.28, Kanglong N0.3Rd, Xinmao Industrial,
Henglan Town, Zhongshan City

Test specification:

Standard.....: IES TM-21

Non-standard test method.....: N/A

The duplication of this report or parts of it and its use for advertising purposes is only allowed in the permission of the testing laboratory. This report is not applicable for lawsuit, refers only to the units submitted for test. A general statement concerning the quality of the products from the series manufacture cannot be derived therefore.

Test item description.....: LED STREET LIGHT

Trade Mark.....: N/A

Model/type reference : YC-S005-30W

Manufacturer of LED driver..... : TMX-30W 80-380V

LED driver surge protection..... : 6KV

Model Number of LED chip..... : LM3030WW-6V-1W

Manufacturer.....: SHENZHEN LVMING PHOTOELECTRIC CO., LTD

Rating : AC85-375V, 50/60Hz,30W

Summary of testing:**Tests performed (name of test and test clause):**

Test performed at 230Vac, 50Hz according to client requirement.


Testing location:

Guangdong KEYS Testing Technology Co., Ltd.

Building 1, No.18, Shihuan Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

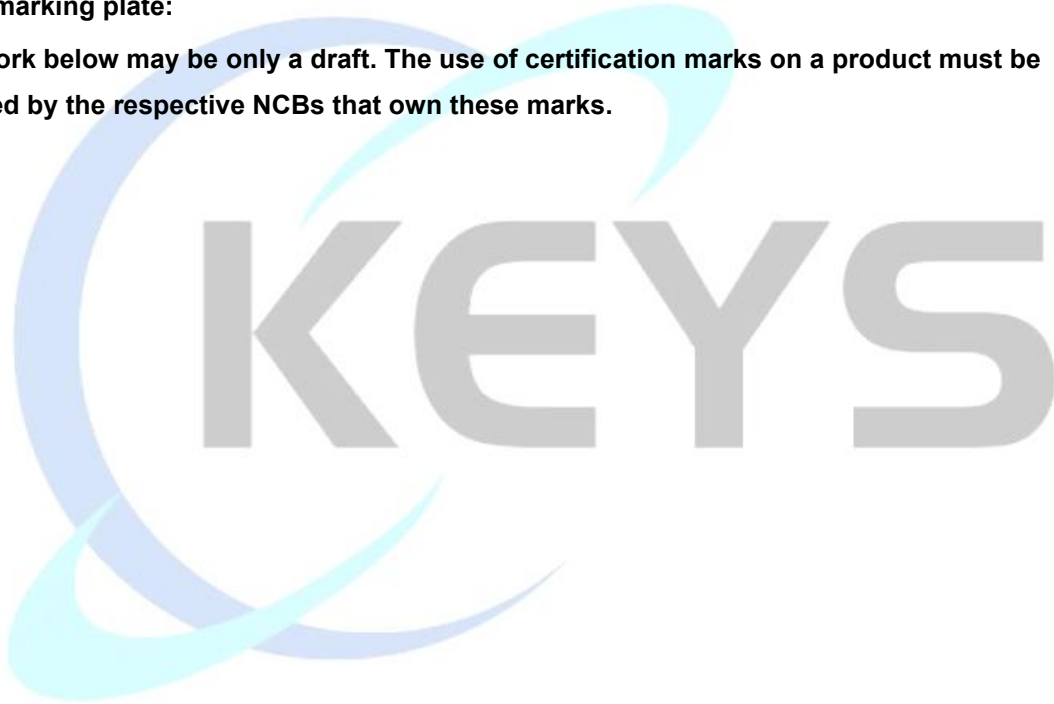


Test item particulars	LED STREET LIGHT										
Classification of installation and use	Class I										
Supply Connection	Power supply cord										
Possible test case verdicts:											
- test case does not apply to the test object.....: N/A											
- test object does meet the requirement.....: P (Pass)											
- test object does not meet the requirement.....: F (Fail)											
Testing											
Date of receipt of test item: May 22, 2024											
Date (s) of performance of tests: May 22, 2024, 2023 to May 24, 2024											
General product information:											
LED Module Information:											
<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th style="width: 20%;">Model</th> <th style="width: 20%;">Rated voltage</th> <th style="width: 20%;">Rated Power</th> <th style="width: 20%;">LED chip quantity(Pcs)</th> <th style="width: 20%;">CRI (Ra)</th> </tr> </thead> <tbody> <tr> <td>YC-S005 30W</td> <td>AC85-375V, 50/60Hz</td> <td>30W</td> <td>30</td> <td>75-80</td> </tr> </tbody> </table>		Model	Rated voltage	Rated Power	LED chip quantity(Pcs)	CRI (Ra)	YC-S005 30W	AC85-375V, 50/60Hz	30W	30	75-80
Model	Rated voltage	Rated Power	LED chip quantity(Pcs)	CRI (Ra)							
YC-S005 30W	AC85-375V, 50/60Hz	30W	30	75-80							
LED specification:											
<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th style="width: 25%;">Model</th> <th style="width: 30%;">Manufacturer</th> <th style="width: 20%;">If(mA)</th> <th style="width: 25%;">Viewing angle</th> </tr> </thead> <tbody> <tr> <td>LM3030WW-6V- 1W</td> <td>SHENZHEN LVMING PHOTOELECTRIC CO., LTD</td> <td>150</td> <td>120°</td> </tr> </tbody> </table>		Model	Manufacturer	If(mA)	Viewing angle	LM3030WW-6V- 1W	SHENZHEN LVMING PHOTOELECTRIC CO., LTD	150	120°		
Model	Manufacturer	If(mA)	Viewing angle								
LM3030WW-6V- 1W	SHENZHEN LVMING PHOTOELECTRIC CO., LTD	150	120°								
1.1 Description of LED Light Sources											
Sample Size:											
60Pcs samples were received on 2020-01-03 ,The samples were numbered from S1 to S20, S21 to S40 and S41 to S60.											
<div style="margin-left: 40px;"> Manufacture: SHENZHEN LVMING PHOTOELECTRIC CO., LTD Part Number: LM3030WW-6V-1W Part Type: LED Package Drive Level: DC 150mA Nominal CCT: 2700K Power: 1W CRI: 75-80 </div>											


1. Test result:

In-situ case temperature measurements test location

The location of the Ts measurement point is shown below (According to LM-80 test report for Guangdong Meide Testing Technology Co., Ltd.).

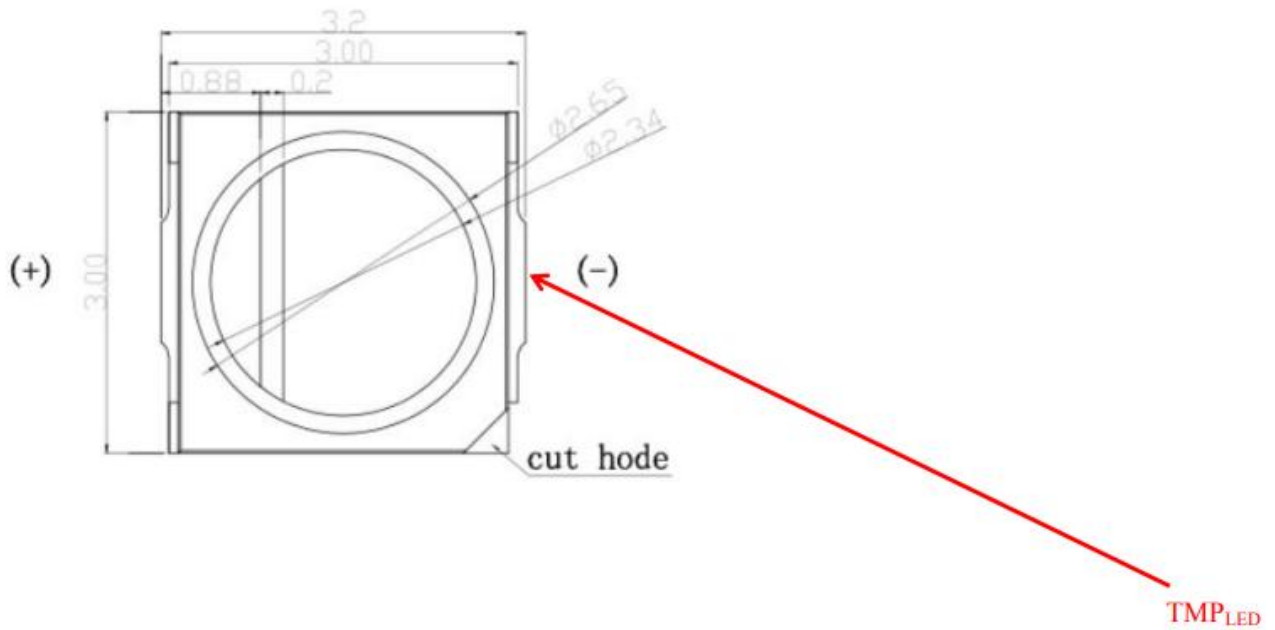

The recommended Ts point is located in the bottom of PCT3030

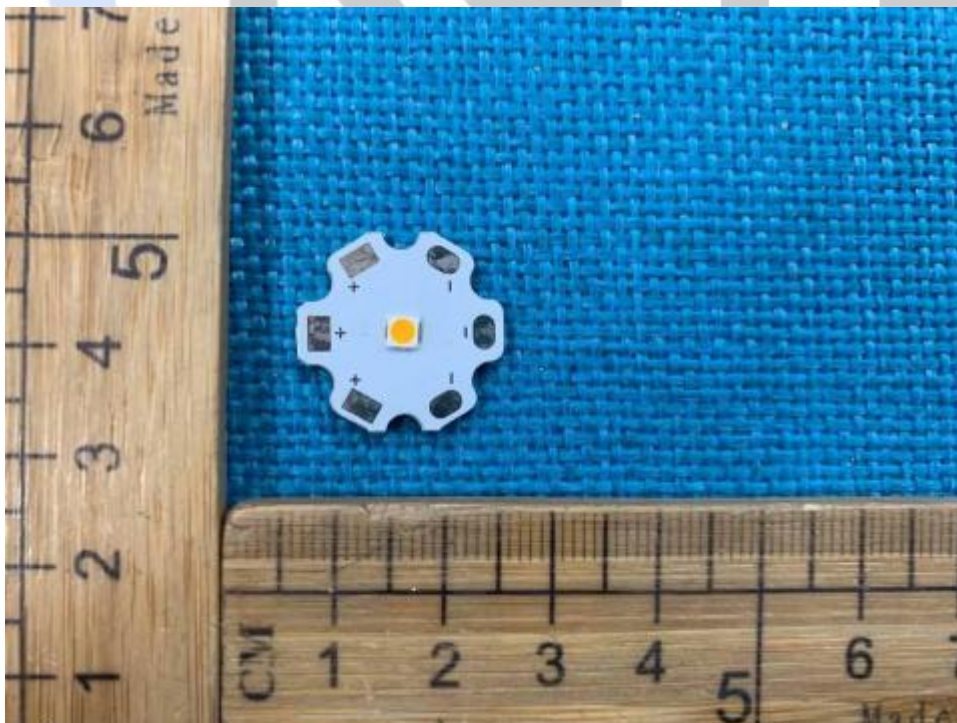

Ts measurement

Tc measurement in LED Modules (downward)	
Model No.	Test voltage
YC-S005 30W	AC230V
Tc measured in luminaire with relevant LED module	Temperature
1# to 3#	55°C, 85°C, 105°C
The highest in-situ temperature	105°C

Input current of LED measurement

If of LED, measurement in LED Modules	
Model No.	Test voltage
LM3030WW-6V-1W	/
IF measured in luminaire with relevant LED	DC150mA

2. Lumen maintenance projection according to TM-21

LM-80 testing details

LM-80 Testing Details	
Total number of units tested per case temperature:	20
Number of failures:	0
Number of units measured:	20
Test duration (hours):	9000
Tested drive current (mA):	150
Tested case temperature 1 (T_c , °C):	55
Tested case temperature 2 (T_c , °C):	85
Tested case temperature 3 (T_c , °C):	105

Test data for 55°C; 85°C; 105°C case temperature

LM-80 Test Inputs

Test Data for 55°C Case Temperature		Test Data for 85°C Case Temperature		Test Data for 105°C Case Temperature	
Time (hours)	Lumen Maintenance (%)	Time (hours)	Lumen Maintenance (%)	Time (hours)	Lumen Maintenance (%)
1000	100.18%	1000	100.60%	1000	99.89%
2000	99.97%	2000	99.89%	2000	99.64%
3000	99.74%	3000	99.69%	3000	99.50%
4000	99.52%	4000	99.47%	4000	99.37%
5000	99.32%	5000	99.19%	5000	99.09%
6000	99.08%	6000	98.97%	6000	98.86%
7000	98.88%	7000	98.75%	7000	98.59%
8000	98.66%	8000	98.55%	8000	98.34%
9000	98.49%	9000	98.28%	9000	98.11%

In-situ inputs

In-Situ Inputs

Drive current for each LED package/array/module (mA):	150
<i>In-situ</i> case temperature (T_c , °C):	105
Percentage of initial lumens to project to (e.g. for L_{70} , enter 70):	90

Calculated of L70

Results

Time (t) at which to estimate lumen maintenance (hours):	9,000
Lumen maintenance at time (t) (%):	98.10%
Reported L90 (hours):	43,000

3. Conclusion

According to the method of IES TM-21-11, the rated lumen maintenance of product may 98.10% at 9000 hours.

4. “ TM-21 Calculator”-Table 1: Report From at LM-80 Test Condition

Table 1: Report at each LM-80 Test Condition					
Description of LED Light Source Tested (manufacturer, model, catalog number)		ZHONGSHAN Y-CHEN LIGHTING TECHNOLOGY CO.LTD Model:YC-S005 30W			
Test Condition 1 - 55°C Case Temp		Test Condition 2 - 85°C Case Temp		Test Condition 3 - 105°C Case Temp	
Sample size	20	Sample size	20	Sample size	20
Number of failures	0	Number of failures	0	Number of failures	0
DUT drive current used in the test (mA)	150	DUT drive current used in the test (mA)	150	DUT drive current used in the test (mA)	150
Test duration (hours)	9,000	Test duration (hours)	9,000	Test duration (hours)	9,000
Test duration used for projection (hour to hour)	4,000 - 9,000	Test duration used for projection (hour to hour)	4,000 - 9,000	Test duration used for projection (hour to hour)	4,000 - 9,000
Tested case temperature (°C)	55	Tested case temperature (°C)	85	Tested case temperature (°C)	105
α	2.115E-06	α	2.338E-06	α	2.552E-06
B	1.004	B	1.004	B	1.004
Reported L90(9k) (hours)	52,000	Reported L90(9k) (hours)	47,000	Reported L90(9k) (hours)	43,000

5. “ TM-21 Calculator”-Table 2: Interpolation Report (projection based on in-situ temperature entered .

Table 2: Interpolation Report (projection based on <i>in-situ</i> temperature entered)	
$T_{s,1}$ ($^{\circ}\text{C}$)	105.00
$T_{s,1}$ (K)	378.15
α_1	2.552E-06
B_1	1.004
$T_{s,2}$ ($^{\circ}\text{C}$)	-
$T_{s,2}$ (K)	-
α_2	-
B_2	-
E_a/k_b	-
A	-
B_0	1.004
$T_{s,i}$ ($^{\circ}\text{C}$)	105.00
$T_{s,i}$ (K)	378.15
α_i	2.552E-06
Reported L90(9k) at 105 $^{\circ}\text{C}$ (hours)	43,000

Product photo



--End of Report--