


Public Address (PA) System 4 Zone Mixer Amplifier with Bluetooth FA-460M/FA-4150M/FA-4280M/FA-4480M/FA-4650M/FA-4850M

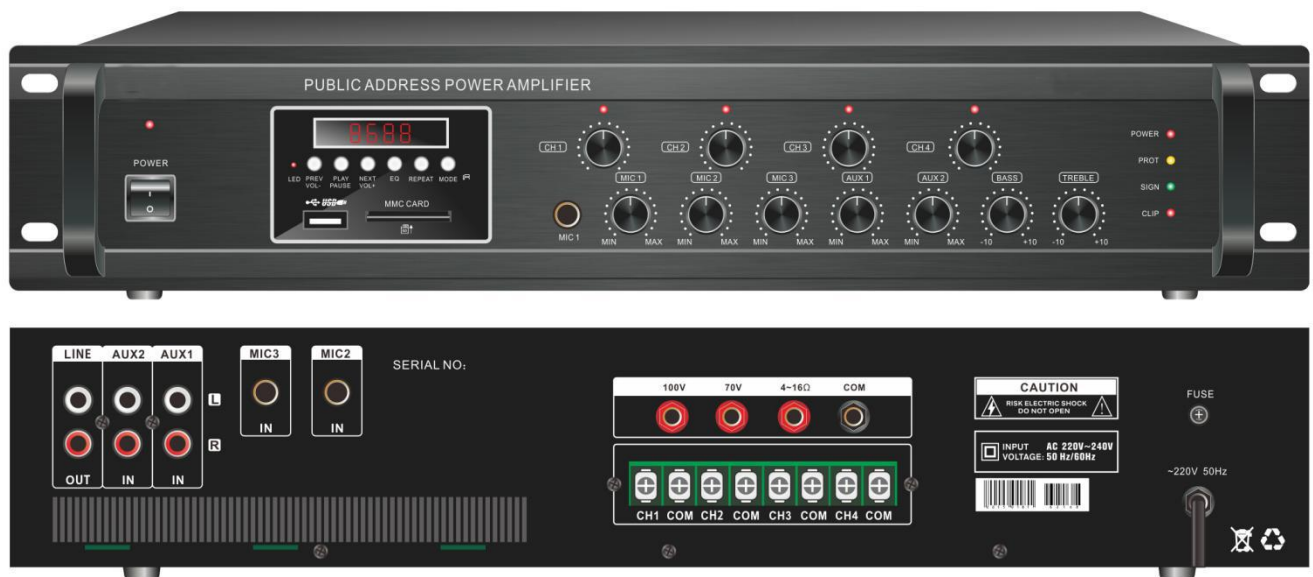

Description:

The PA 4 Zone Mixer Amplifier with MP3 and FM /SD/Bluetooth, its rated power output from 60W, 150W, 280W, 480W to 850W,

it is ideal for school, super market, bank, hotel BGM and speech use. It is all in one solution with two sources, preamplifier and mixer power amplifier into one 19" 2U height unit, which is economy but of high reliable performance.

The amplifier is with 3 MIC and two line input. Mic1 VOX with highest priority except EMC input. One USB and one SD slots on front provide easy access and operation for installer and end-user.

The amplifier is design with complete protection of overload, short circuit and high temp to avoid any damage.

These amplifiers are suitable for applications in bank, mosque, school, hotel, restaurant, theme centers and shopping center.


Features:

- Public address (PA) 4 zone commercial mixer power amplifier.
- 19" rack mount amplifier of 2U height.
- Rated outputs of 60W, 150W, 280W, 480W to 850W.
- 4 zone speaker outputs of 100V or 70V and 8ohms
- Four zone speaker outputs with independent volume control.
- Built-in MP3 player by USB & SD and FM tuner and Blue tooth
- Three microphone inputs, Mic1(6.3mm) in front panel and MIC2-3 on rear panel
- Line 1-2 inputs on rear panel by RCA.
- Microphone1 of VOX features of highest input priority.
- Volume control for Mic1-3 and line 1-2, bass & treble and zone volume control on front panel.
- Overload, short circuit and high temp protection.

Public Address (PA) System 4 Zone Mixer Amplifier with Bluetooth

FA-460M/FA-4150M/FA-4280M/FA-4480M/FA-4650M/FA-4850M

Rear Panel:

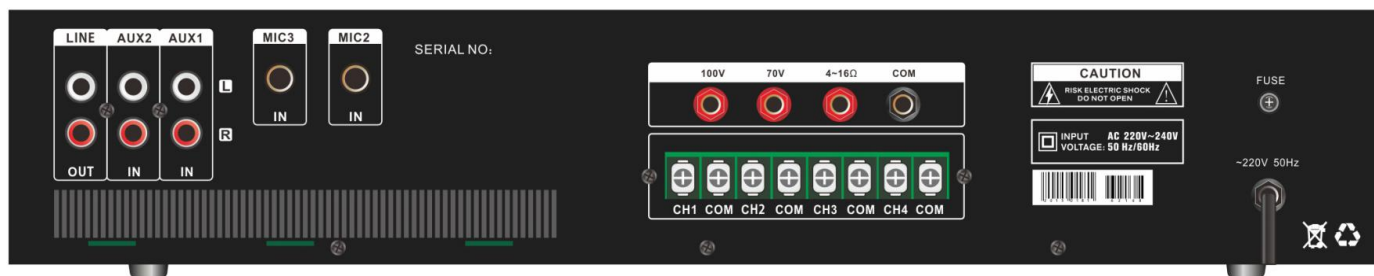

Specification:

Model	FA-460M	FA-4150M	FA-4280M	FA-4480M	FA-4850M
Description	Public Address System 60W Mixer Amplifier				
Rated Power Output	60W	150w	280w	480w	850w
Speaker Output	70V, 100V and 8ohms, 4zone speaker out 100V				
Input	Mic1-3: 600 ohms(Ω) 5-8 mV, unbalanced, Line1-2: 10k ohms(Ω) 150-470 mV, unbalanced				
Frequency Response	60-15KHz				
THD	<0.5% at 1kHz, 1/3 rated power				
S/N Ratio	Line: 85 dB , MIC: >72 dB				
Protection	High temp, short circuit, overload protection				
Power Supply	AC230V or AC110V, 50-60Hz				
Power Consumption	100W	200W	400W	650W	1000W
Dimension	418(W) \times 318(D) \times 88(H)mm				
Gross Weight	7.5kg	9.5kg	12.2kg	16kg	17.6kg
Warranty	3 years				