


IP-Network Wall Mount Bluetooth Amplifier (2*15W 8ohms) FIP-915WM

Feature:

- IP network amplifier with audio decoder
- Huge system capacity of 5,000 zones paging and multiple BGM system.
- IP based public address system over LAN/WAN or Internet.
- Minimum cable connection by using existing network framework.
- IP audio decoder built-in 2×15 Watt/8 Ohm Amplifier.
- One microphone input and one line input and one line output.
- Enable to broadcast Mp3 program or pre-recorded voice message from PC server to IP amplifier.
- Contact in and contact out can be programmed to play music or pre-recorded message to pre-set zones.
- Support DC24V input /SD Player and Bluetooth player

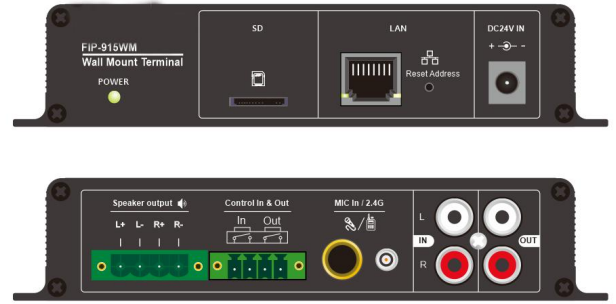

Specification:

Model	FIP-915WM
Description	IP Audio Decoder with Amplifier
Rated Power Output	2×15 Watt/8 Ohm
Protocol Support	TCP/IP, UDP, IGMP, ARP, UDP
Transmit Speed	10/100Mbps
Audio Format	16 digit stereo CD tone
Frequency Response	20Hz~16KHz
THD	≤0.3%
S/N Ratio	≥85dB
Connector	One RJ45 port, one mic input and one line input and one line output
Speaker Output	8 Ohm
Working Temperature	-5°C to +40°C
Humidity	10% ~ 90%
Power Consumption	60W
Power Supply	AC220V, 50-60Hz
Dimensions	156x156x35mm
Weight	0.8kg

System Diagram:

