

6" Coaxial Ceiling Speaker (5W/10W/20W/30W)

FCS-640PH

Feature:


- ✓ Commercial public address system ceiling speaker with transformer.
- ✓ Hi-fi range coaxial ceiling loudspeaker with ABS cover
- ✓ Ideal for school, restaurant, hotel, train station & airport BGM and speech use.
- ✓ Rated power output 5W/10W/20W/30W at 100V and 8ohms
- ✓ 6" coaxial PP driver unit with 1" tweeter
- ✓ Line input 100V or 70V & 8 Ω .
- ✓ Flush mount in-ceiling quick and secure installation.
- ✓ Wide dispersion rang installation PA loudspeaker.



Specification:

Model	FCS-630PH
Description	6" Coaxial Ceiling Speaker
Rated Power Output	30W/20W/10W/5W&8Ω
Line Input	100V or 70V & 8 Ω
Frequency Response	70-20KHz
SPL(@1W/m)	90dB
Speaker Unit	6" coaxial PP driver with 1" tweeter
Cutout Size	250mm
Dimension	Φ280x190mm
Material	ABS enclosure, metal grille and ABS cover in white
Mounting Way	Flush mount in-ceiling quick and secure installation
Weight	2.72kg

Side View & Dimension:

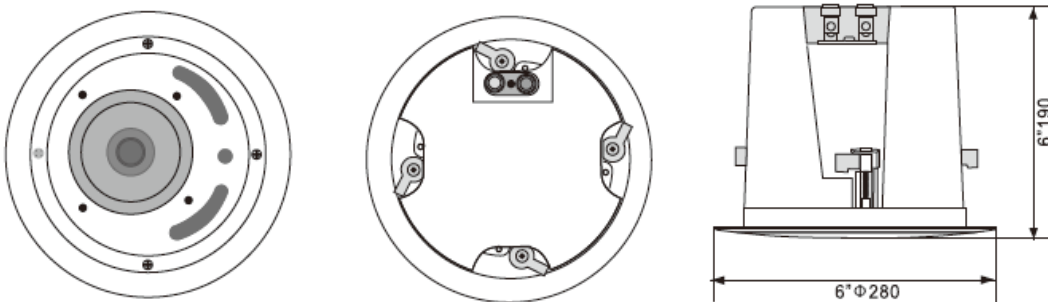

SPL VS Angle & SPL VS Frequency Diagrams:

