


FA-4500D

Class-D Four Channel 500W Power Amplifier

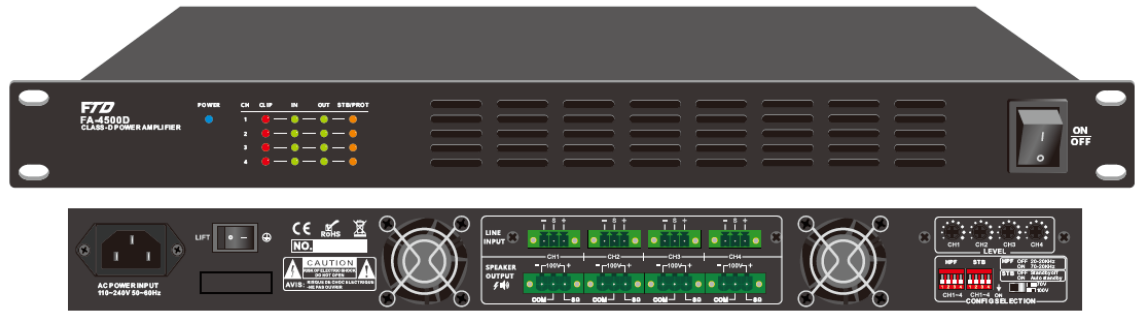

Features:

- Switching power technology digital power amplifier
- Class-D PA power amplifier of minimum power consumption
- Less rack space and less heat generation
- Four channel power amplifier into 19" rack mount unit
- Rated power output at 4x500W
- Four channel separate speaker outputs 4Ω/100V
- Balanced XLR input by phoenix connector for four channels
- Each input with separate gain control.
- Each four channel with high-cut filter.
- Support 100V/70V/80HMS
- Built-in auto standby feature to save power consumption
- Separate four channel indicators for protection, clip, input and output
- Complete short circuit, overload, high temp, clip and DC protection
- Wide AC input switchable between 115V and 230V

Description:

The FA-4500D range digital class-D power amplifier is of switching power technology, which features of minimum power consumption and much higher efficiency up to 85%, moreover it helps to save installation rack space, generate less heat so as to extend its performance life span as a result.

The FA-4500D is of rated power output at 4×500W, so it could be used as four zone multiple sources public address system at minimum cost. The versatile loudspeaker outputs of both high impedance 100V & low impedance 4ohms enable it meet both PA fixed installation and Hi-fi stereo sound installation jobs.

There are four balanced inputs by phoenix connector for each channel with gain control. Four separate zone speaker outputs both by 100V & 4ohms. The built-in four channel separate high-pass filters could be enabled or disabled through the dip switch pre-setting.

Automatic standby enable after no detection of signal input for one minute, immediately wake up at sight of any input. Visual working status indicators include protection, clip, input and output for easy supervision. With complete short circuit, overload, high temp, clip and DC protection.

Switchable AC power supply from 115V to 230V, thus it support worldwide sound system installation.

FA-4500D

Class-D Four Channel 500W Power Amplifier

Specification:

Model	FA-4120D	FA-4240D	FA-4350D	FA-4500D
Description	Class-D Four Channel Power Amplifier			
Rated Power Output	4x120W	4x240W	4x350W	4x500W
Speaker Output	4Ω & 100V			
Frequency Response	L/H Cut OFF 20Hz-20KHz (+1/-2dB) L/H Cut ON 70Hz-10KHz (+1/-3dB)			
Input	0.775V, 0dBu, balanced phoenix connector by four channels			
Input Impedance	10KΩ			
THD	<0.1% (1KHz/-3dBv, 100W)			
S/N Ratio	>80dB			
Crosstalk	>60dB, 1KHz, Max output			
Power Consumption	600W	1200W	1750W	2300W
Power Supply	AC input switchable between 115V & 230V, 50-60Hz			
Dimension	482(W)x420(D)x44(H) mm			
Weight	8.5kg	9KG	9.5KG	15KG

Applications:



Voice Evacuation System
School, Airport, Train Station



AV Control System
Hotel, Conventional Center, Stadium

