

PA Amplifier with ECHO/USB/SD & FM & Blue Tooth FA-120EC/FA-240EC/FA-350EC/FA-500EC



Description:

The Public Address (PA) Mixer Amplifier is suitable for school, super market, bank, hotel BGM and speech use.

It integrates pre amplifier, Mp3 player and mixer power amplifier into one 19" 2U height unit of tabletop design, which is economy but of high reliable performance..

The rack size mixer amplifier rated power out at 60W-500w. Its speaker outputs with 100V, 70V and 4 - 16ohms for versatile connections.

It integrates three microphone and two line inputs. Mic1 VOX with priority. Microphone1 on front panel by phone jack, microphone2 - 3 on rear panel by phone jack, line 1 - 2 on rear panel by RCA inputs. Microphone1 - 3 & Line1 - 2 inputs volume control on front panel with bass and treble tone control.

The amplifier is design with complete protection of overload, short circuit and high temp to avoid any damage.


Features:

- 19" rack mount public address amplifier
- PA amplifier with Mp3 player, FM radio & blue tooth and SD card
- Echo with delay time, times and echo volume control
- Rate power output at 120W, 240W, 350W to 500W
- Speaker output of 100V or 70V & 4Ohms-8 Ohms-16 Ohms
- Mp3 player with USB/SD input on front panel, IR remote control for Mp3 player, FM radio and blue tooth
- LED indicators for power, clip, protect and signal
- Mic1 in 6.35 phone jack , MIC2 and MIC3 with phantom power on rear panel. Microphone input or line switchable by DIP switch. Line 3-4 input of RCA input and one RCA line
- EMC input with highest priority
- Volume control for Mic1-3, line1-2, Mp3/FM, bass/treble and master
- With short-circuit, clip, overload and high temp protection
- AC 110 or 220V & 24V DC both operation system
- With 19" rack mount ears

PA Amplifier with ECHO/USB/SD & FM & Blue Tooth

FA-120EC/FA-240EC/FA-350EC/FA-500EC

Rear Panel:

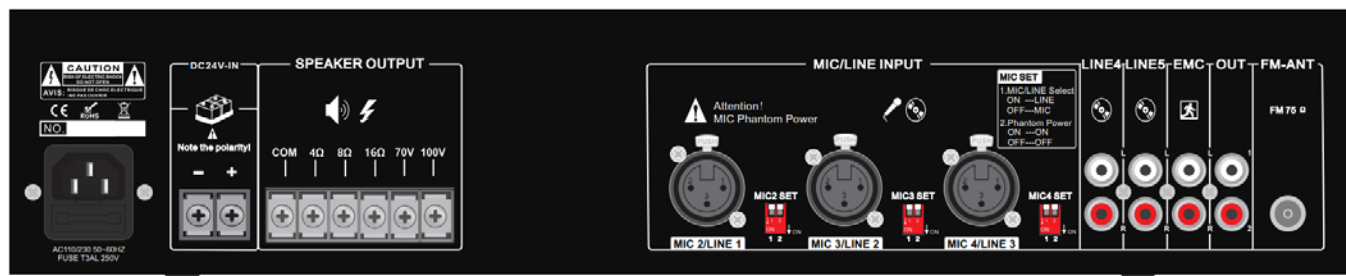

Specification:

Model	FA-120C	FA-240C	FA-350C	FA-500C
Description	Public Address System 60W Mixer Amplifier			
Rated Power Output	120w	240w	350w	500w
Speaker Output	70V, 100V and 4-16Ω			
Input	Mic1-3: 600 ohms(Ω) 5-8 mV, unbalanced, Line1-2: 10k ohms(Ω) 150-470 mV,			
Frequency Response	60-15KHz			
THD	<0.5% at 1kHz, 1/3 rated power			
S/N Ratio	Line: 85 dB , MIC: >72 dB			
Protection	High temp, short circuit, overload protection			
Power Supply	AC230V or DC24V, 50-60Hz			
Power Consumption	150W	310W	450W	650W
Dimension	484(W)×366(D)×88(H)mm			
Packaging:	484W)×335(D)×88(H)mm			
Gross Weight	6.6kg	9.6kg	11.9kg	13.7kg
Warranty	3 years			