



Guangzhou FTD Audio Limited

Datasheet - FFS-406

5" Fireproof Wall Mount Speaker (0.75W-1.5W-3W-6W)



FFS-406 is EN54-24 certified wall mount speaker with fire dome, all metal, ceramic connector, thermal fuse and dedicated designed for voice alarm & voice evacuation system use.





Features:

- Compliant with the EN54-24 standards
- Commercial fireproof wall mount speaker with 100V/70V transformer
- Ideal for school, office, hotel and airport voice evacuation and PA system
- Rated power output 0.75W-1.5W-3W-6W at 100V
- 5" full range driver unit
- Line input 100V or 70V with transformer
- Ceramic connector, fire dome, 95 °C fire - resistant cable and thermal fuse
- Steel enclosure, steel grille and fire dome in white
- Wall mount or surface mount quick installation by screw hole

Mounting, Dimension & Side View:



Frequency Response & SPL Diagram:

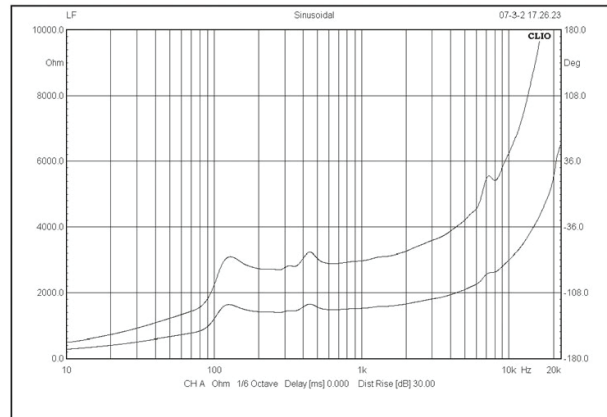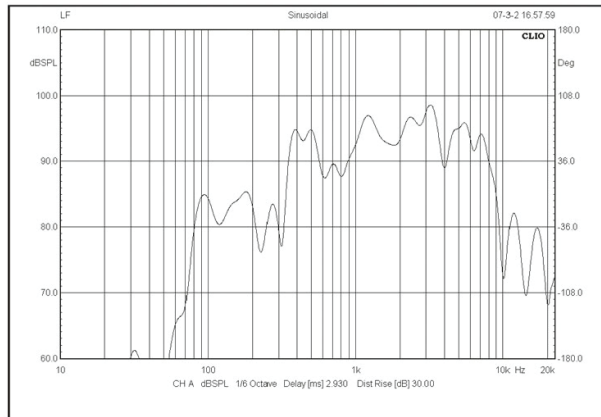

Specification:

Model	FFS-406
Installation	Wall Mount
Standart	EN54-24
Max. Power	6W
Transformer Tapping	0.75W-1.5W-3W-6W
Line Input	100V or 70V
Frequency Response	120-10KHz
SPL(@1W/m)	92dB/Max 99dB
Color	White
Speaker Unit	5" full range driver unit
Dimension	165×165×60mm
Material	Steel enclosure, steel grille and fire dome in white
Mounting Way	Quick installation by hanging screw hole
Weight	1.4kg