



Guangzhou FTD Audio Limited

## Datasheet - FFS-205EN

5" Fireproof Ceiling Speaker (1.5W-3W-6W)


FFS-205EN is EN54-24 certified ceiling speaker with fire dome, all metal, ceramic connector, thermal fuse and dedicated designed for voice alarm & voice evacuation system use.




### Features:

- Compliant with the EN54-24 standards
- In-ceiling fast installation type loudspeaker
- Ideal for school, office, hotel and airport voice evacuation and PA system
- Rated power output 1.5W-3W-6W at 100V
- 5" full range paper cone
- Line input 100V or 70V with transformer
- Ceramic connector, fire dome, 95 °C fire - resistant cable and thermal fuse
- Steel enclosure, steel grille and fire dome in white
- Fast installation by its three spring clips

### Mounting, Dimension & Side View:

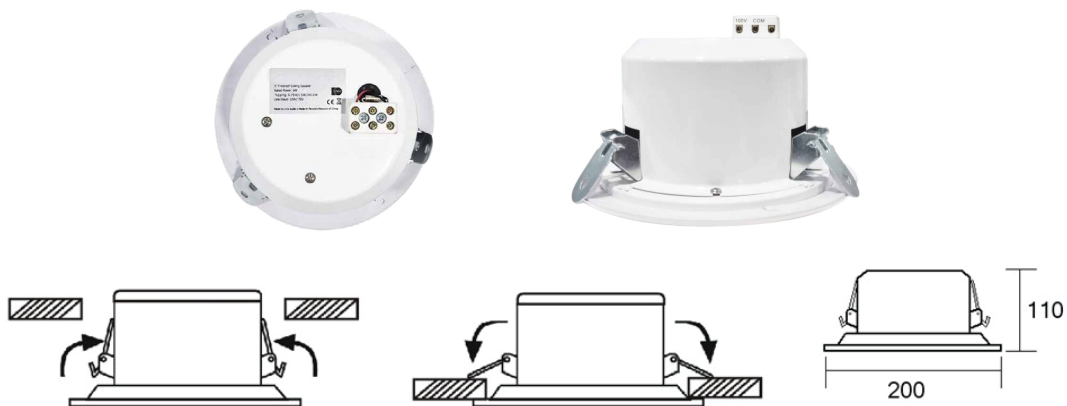

## Frequency Response & SPL Diagram:

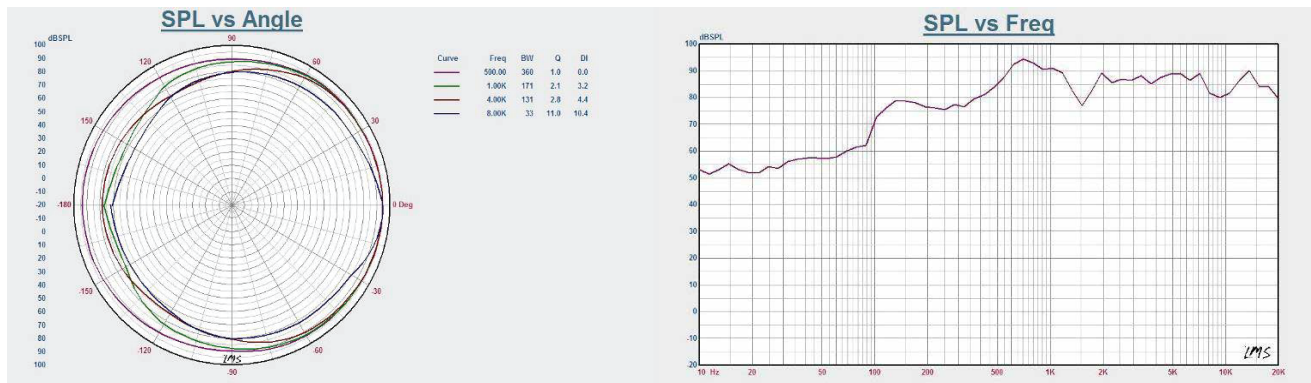

## Specification:

Model	FFS-205EN
Desription	EN54-24 Ceiling Speaker
Standart	EN54-24
Max. Power	6W
Transformer Tapping	1.5W-3W-6W
Line Input	100V or 70V
Frequency Response	110-14.5KHz (-10dB)
SPL(@1W/m)	91dB/Max 98dB
Material	Steel enclosure, steel grille and fire dome in white
Speaker Unit	5" full range paper cone
Dimension	Ø 200 x 105mm
Cutout Size	Ø 175mm
Mounting Way	Spring-clip
Weight	0.9 kg