



PT Self-clean Submarine Camera

Model: SELF-CLEAN-316L

Resolution: 4MP/2MP optional

Features

- ★ Underwater use, 20meter's depth working environment;
- ★ Support Self-cleaning wiper;
- ★ Built-in 12V DC,
- ★ Support TF slot is optional;
- ★ Underwater stainless-steel 306L design, submarine salt water environmental working ;
- ★ 4MP resolution, Wide angle lens;
- ★ 8pcs $\Phi 5$ lighting LED, underwater Yellow lighting distance 5meters
- ★ Low illumination: support super low illumination;
- ★ Supports Web, PC CMS, APP;
- ★ 10/100M Ethernet RJ45 output/with 4G Module on shore.

Specifications

www.accumtek.com/en
info@accumtek.com

All copy rights belong to Accumtek corporation limited


PT Wiper Submarine Camera

Camera	Sensor+ISP	1/2.8" 1/1.8" CMOS GK7205V300
	Resolution	Mainstream 2560×1440 Substream 800x600/800x448
	Frame rates	12.5fps, 32Kbps~6Mbps
	Low illumination	0.001 Lux@F1.0
	Lens	2.8mm Wide Lens
	Optical Zoom	Nil
	View angle	Level 110°
Night vision	LED	8pcs Φ5 lighting LED
	Night vision mode	IR/Warm lighting
	IR modes	Auto/IR/Full color
Video Audio Alarm	Compression	H.265; MPEG4
	Resolution	Main stream 2560x1920 or 2560x1440; Sub-stream 800x600 or 800x448
	Frame rate	12.5fps
	Audio Code Rate	Nil
	Audio	Nil
	Speaker	Nil
	Alarm	Human shape detection, Motion detection alarm
Networking	LAN	10/100M Ethernet Port/ 4G Module
Storage	TF	Optional 16G/32G/64G/128G TF, Optional
Mechanical	Size	230*85*165mm
	Housing material	Anti-Corrosion metal
	Bracket	Anti -Corrosion metal
	Connectors	DC 12V

PT Wiper Submarine Camera

	Power	Dc 12V
	Consumption	Lighting on: <9W, Wiper on <30W
	Temperature	-30°C~65°C
	Cable	Anti-strain Network Cable 20meters
	Installation	Underwater
Package	Package size	Size:300*450mm
	Weight	2.5KG cables

Dimensions:

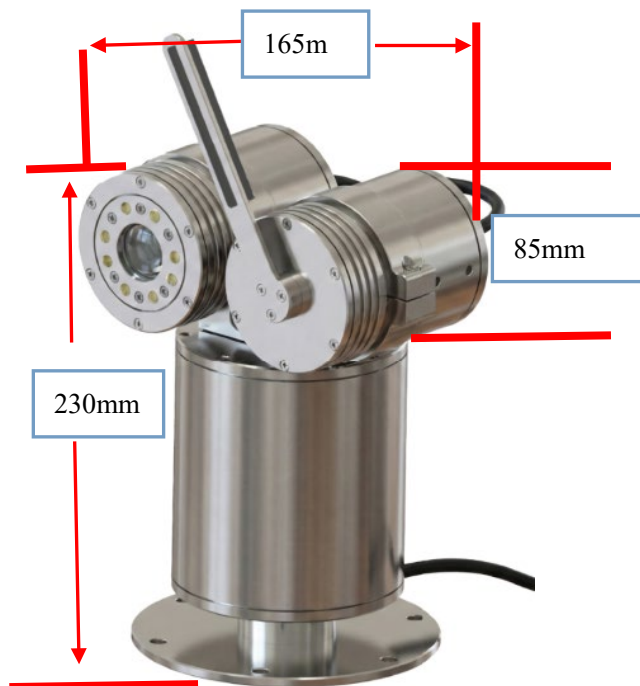

Topological graph

